


NOTE  
FACE VIEW  
ON CONNECTOR

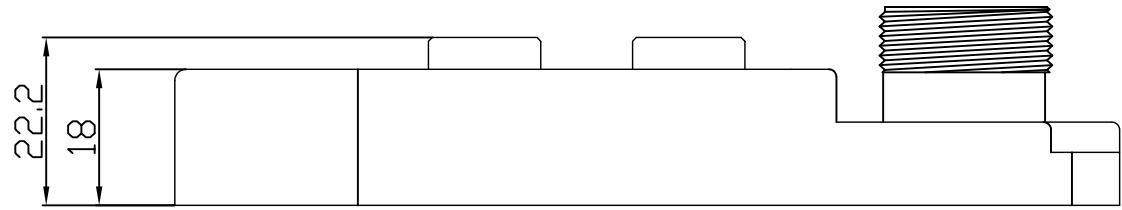

MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH	CABLE JACKET MATERIAL
1201140031	BTY403P-FBC	-	-

VOLTAGE RATING	10-30 VDC
AMPERAGE RATING PER PORT	4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 90°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E46237
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	NYLON	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	O-RING	NITRILE	RED
4	RECEPTACLE SHELL	BRASS	NICKEL PLATED
5	HOUSING	PBT	YELLOW
6	LABEL	ABS	WHITE
7	LENS	NYLON	CLEAR

DESCRIPTION EC NO: WEU2010-0423 DRWN: LSTEMMLE 2010/03/10 CH'KD: NSTAUDIG APPR: NSTAUDIG 2010/03/16	QUALITY SYMBOLS ▽ = 0 ▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE <b>MM ONLY</b>	SCALE <b>2:1</b>	DESIGN UNITS <b>METRIC</b>	THIRD ANGLE PROJECTION	
		4 PLACES ± --- mm ± --- INCH	DRAWN BY LSTEMMLE	DATE 2010/03/10	<b>MICRO-CHANGE MPIS 4 PORT PNP TWIN PORT RECEPTACLES HARD SHELL</b>			
		3 PLACES ± --- mm ± --- INCH	CHECKED BY FP	DATE 2010/03/11				
		2 PLACES ± --- mm ± .01 INCH	APPROVED BY NSTAUDIG	DATE 2010/03/15	<b>MOLEX INCORPORATED</b>	DOCUMENT NO. <b>SD-120114-018</b>	SHEET NO. <b>1 OF 1</b>	
<b>1</b>	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE <b>A3</b>	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			