

D-SUB contact support - VS-25-BU-DSUB-CD-B - 1689967

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

D-SUB contact carrier, shell size 3, for 25 signal contacts, type of contact socket, for crimp contacts, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-25-...



RoHS

Key Commercial Data

| | |
|--------------|---------------|
| Packing unit | 10 STK |
| GTIN | |
| GTIN | 4017918914363 |

Technical data

Mechanical characteristics

| | |
|------------------------------------|------------------|
| Number of positions | 25 |
| Connection profile | 25-pos. D-SUB |
| Insertion/withdrawal cycles | ≥ 500 |
| Connection method | Crimp connection |
| Insertion force per signal contact | ≤ 3.40 N |
| Mounting type | Hole |
| Type | 25 |
| Size of housing | 3 |

Ambient conditions

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -55 °C ... 130 °C |
|---------------------------------|-------------------|

Material data

| | |
|--|---|
| Flammability rating according to UL 94 | V0 |
| Housing material | Steel, tin-plated |
| Contact carrier material | Glass-fiber reinforced thermoplastics, UL 94 V0 |

Electrical characteristics

| | |
|---------------------|----|
| Number of positions | 25 |
|---------------------|----|

D-SUB contact support - VS-25-BU-DSUB-CD-B - 1689967

Technical data

Electrical characteristics

| | |
|-----------------------|----------------|
| Rated current | 5 A (at 20 °C) |
| Overvoltage category | III |
| Degree of pollution | 2 |
| Rated voltage (III/3) | 125 V |
| Test voltage | 1200 V |


Standards and Regulations

| | |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings

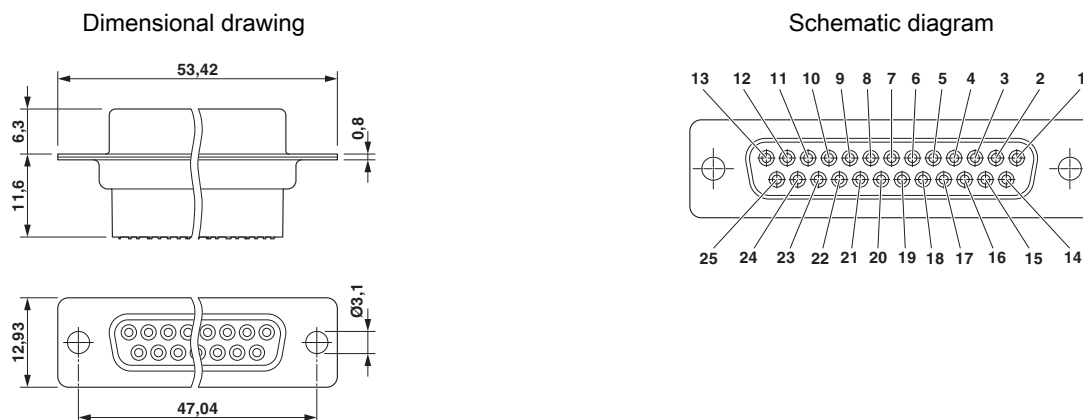

D-SUB contact carrier

Approvals

Approvals

Approvals


UL Recognized / EAC

Ex Approvals

Approval details

D-SUB contact support - VS-25-BU-DSUB-CD-B - 1689967

Approvals

| | | | |
|---------------|---|---|---------------|
| UL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 118976 |
|---------------|---|---|---------------|

| | | | |
|-----|---|--|---------|
| EAC |  | | B.01742 |
|-----|---|--|---------|

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>