


| P1 | COLOR |
|----|--------|
| 1 | WHITE |
| 2 | ORANGE |
| 3 | BLACK |
| 4 | RED |
| 5 | GREEN |
| 6 | YELLOW |
| 7 | BLUE |
| 8 | BROWN |

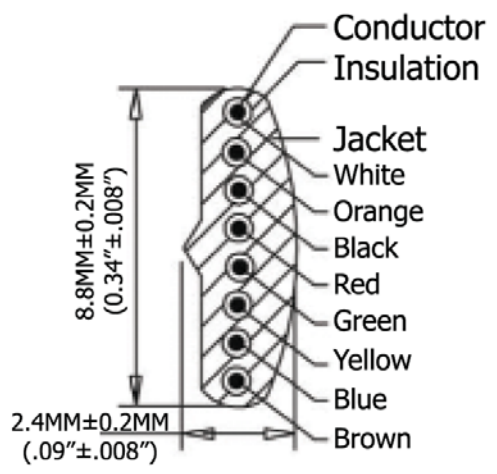

| Extended Length ("L2") | Typical Retracted Length ("L1") |
|---------------------------|---------------------------------|
| 84.0 Inches - 96.6 Inches | 39.5 Inches |
| 2,133.6MM-2,453.64MM | 1,003.3MM |

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50μ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54μm[.000100] thick nickel underplate
- Conductor(X8C): 26AWG (0.12X12) Bare Copper
- Insulation(X8C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

Electrical:

- Voltage rating: 30V (DC)

SBC: A-A

| | | | | | | | |
|-----------|-------|--|--------------|------|----------|----------|---|
| Scale | 1:1 | | | | | Name | Item No. |
| TOLERANCE | | | | | Drawn | 11.02.11 | AT-C-26-8/8/S-7-OE |
| X.X | ±0.40 | | | | Approved | | |
| X.XX | ±0.25 | | | | | | Title NON-UL 26AWG (0.12X12)*8C, O.D.: 2.4*8.8MM, Single Plug, 50μ" of contact plating, SILVER |
| X.XXX | ±0.15 | | | | | | Drawing No. |
| Angle | ±3° | | | | | | rev00 |
| | | | | | | | Replace |
| | | | | | | | Sheet |
| | | | Modification | Date | Name | | |

