

JULIA-A

~90° 160° wide beam. Assembly with installation tape.


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 18.8 mm
Height	4.8 mm
Fastening	tape, pin
Colour	clear
Box size	
Box weight	3.7 kg
Quantity in Box	2850 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
JULIA-A	Lens	PMMA	clear
TINA-TAPE3	Tape	PU tape	black

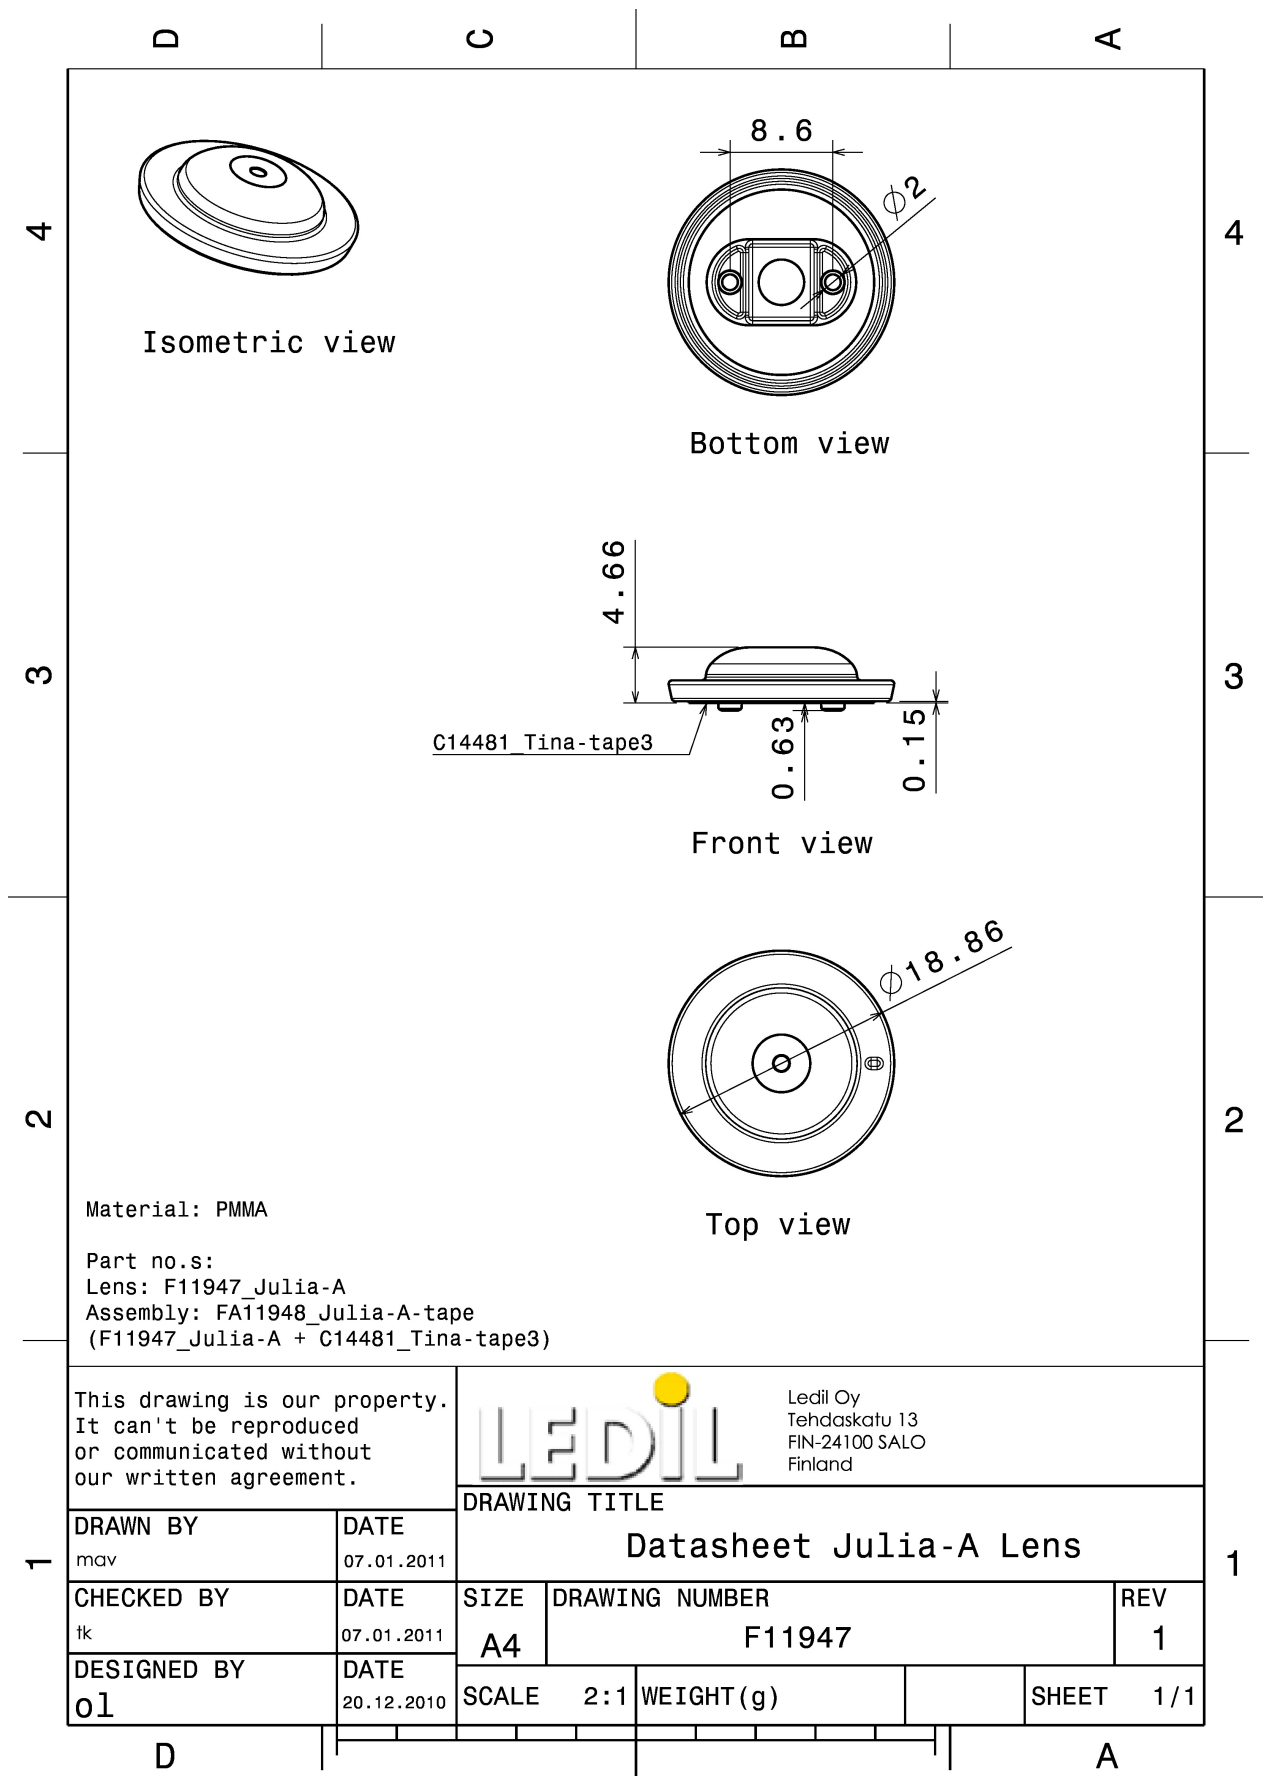

PHOTOMETRIC DATA (MEASURED):

CREE


LED XP-E
FWHM 164.0°
Efficiency 90 %
Peak intensity 0.240 cd/lm
Required components:

CREE

LED XP-G
FWHM 166.0°
Efficiency 90 %
Peak intensity 0.210 cd/lm
Required components:

CREE

LED XP-G3
FWHM 166.0°
Efficiency 85 %
Peak intensity 0.240 cd/lm
Required components:

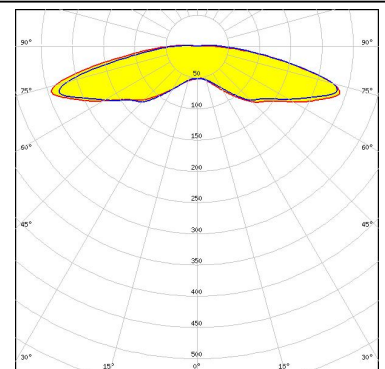

LUMILEDS

LED LUXEON Rebel
FWHM 154.0°
Efficiency 90 %
Peak intensity 0.260 cd/lm
Required components:

PHOTOMETRIC DATA (MEASURED):

LUMILEDS

LED LUXEON Rebel ES
FWHM 163.0°
Efficiency 90 %
Peak intensity 0.240 cd/lm
Required components:

NICHIA


LED NCSxx19A
FWHM 156.0°
Efficiency 90 %
Peak intensity 0.240 cd/lm
Required components:

NICHIA

LED NVSxx19A
FWHM 159.0°
Efficiency 90 %
Peak intensity 0.240 cd/lm
Required components:

OSRAM Opto Semiconductors

LED Oslon SSL 150
FWHM 159.0°
Efficiency 90 %
Peak intensity 0.300 cd/lm
Required components:

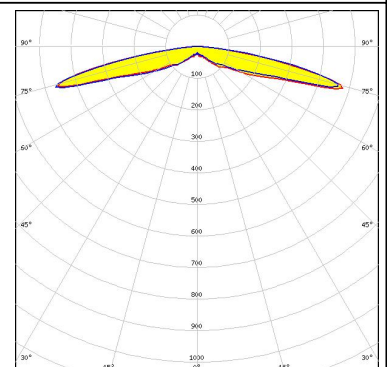


PHOTOMETRIC DATA (MEASURED):

OSRAM
Opto Semiconductors

LED Oslon SSL 80
FWHM 158.0°
Efficiency 90 %
Peak intensity 0.200 cd/lm
Required components:

SEOL
SEOUL SEMICONDUCTOR

LED Z5
FWHM 160.0°
Efficiency 86 %
Peak intensity 0.240 cd/lm
Required components:

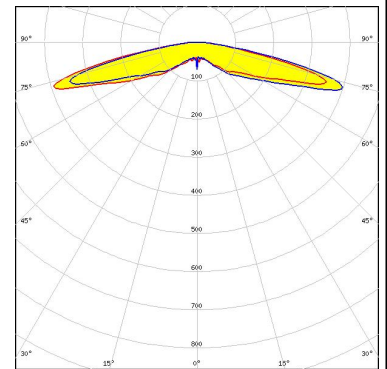

PHOTOMETRIC DATA (SIMULATED):

CREE 


LED J Series 3030

FWHM 153.0°

Efficiency 93 %

Peak intensity 0.370 cd/lm

Required components:

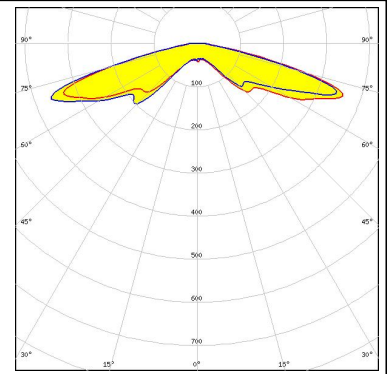

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)