


LOC	DIST	REVISIONS					
—	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		CONTACT PIN BASE MATERIAL & PLATING CHANGE	07JULY2014	KJK	JK

POS	L±0.4	PART NUMBER
—	—	—
2	5.08	— 2
3	7.62	— 3
4	10.16	— 4
5	12.70	— 5
6	15.24	— 6
7	17.78	— 7
8	20.32	— 8
9	22.86	— 9
10	25.40	1 0
11	27.94	1- -1
12	30.48	1 2
13	33.02	1 3
14	35.56	1- -4
15	38.10	1 5
16	40.64	1 6
17	43.18	1- -7
18	45.72	1 8
19	48.26	1 9
20	50.80	2- -0
21	53.34	2- -1
22	55.88	2- -2
23	58.42	2- -3
24	60.96	2- -4
25	63.50	2- -5
26	66.04	2- -6
27	68.58	2- -7
28	71.12	2 8
29	73.66	2- -9
30	76.20	3- -0
31	78.74	3- -1
32	81.28	3- -2
33	83.82	3- -3
34	86.36	3- -4
35	88.90	3- -5
36	91.44	3 6
37	93.98	3- -7
38	96.52	3- -8
39	99.06	3- -9
40	101.60	4- -0
41	104.14	4- -1
42	106.68	4- -2
43	109.22	4- -3
44	111.76	4- -4
45	114.30	4- -5
46	116.84	4- -6
47	119.38	4- -7
48	121.92	4- -8
49	124.46	4- -9
50	127.00	5 828 081 0

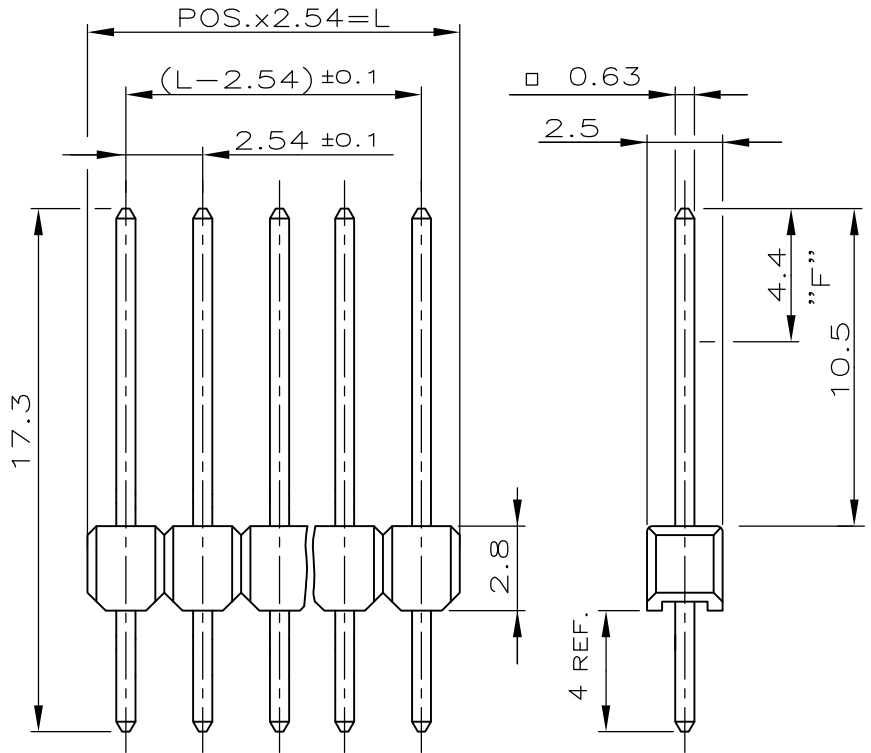

NOTES:

- 1 MATING SIDE: MIN. 0.7µm PdNi +MIN. 0.1µm GOLD FLASH AT CONTACT AREA "F" OVER 1.27µm NICKEL
SOLDER SIDE: MIN. 2.5µm TIN OVER 1.27µm NICKEL
- 2 OBSOLETE

CONTACT PIN	CuZn	1
PIN HOUSING	PBT	GREEN
DESCRIPTION	MATERIAL	FINISH
		COLOR

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

COPYRIGHT - By -

THIS DRAWING IS UNPUBLISHED.

DIMENSIONS: mm	DWN	31.08.89	MATERIAL	SEE TABLE	FINISH	SEE TABLE	
	CHK	G.HOLAUS					
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	—	TE Connectivity				
	PRODUCT SPEC	SCHAAR.					
0 PLC ±0.2 mm	NAME	108-18012	AMPMODU II PIN HEADER, SINGLE ROW				
1 PLC ± -	SIZE	—	CAGE CODE	DRAWING NO	RESTRICTED TO		
2 PLC ± -	WEIGHT	—	A4	00779	C-828081	—	
3 PLC ± -			CUSTOMER DRAWING			SCALE	4:1
4 PLC ± -						SHEET	1 OF 1
ANGLES ± -						REV	B

