

A

B

C

D

E

F

G

H

A

B

C


D

E


F

G

H

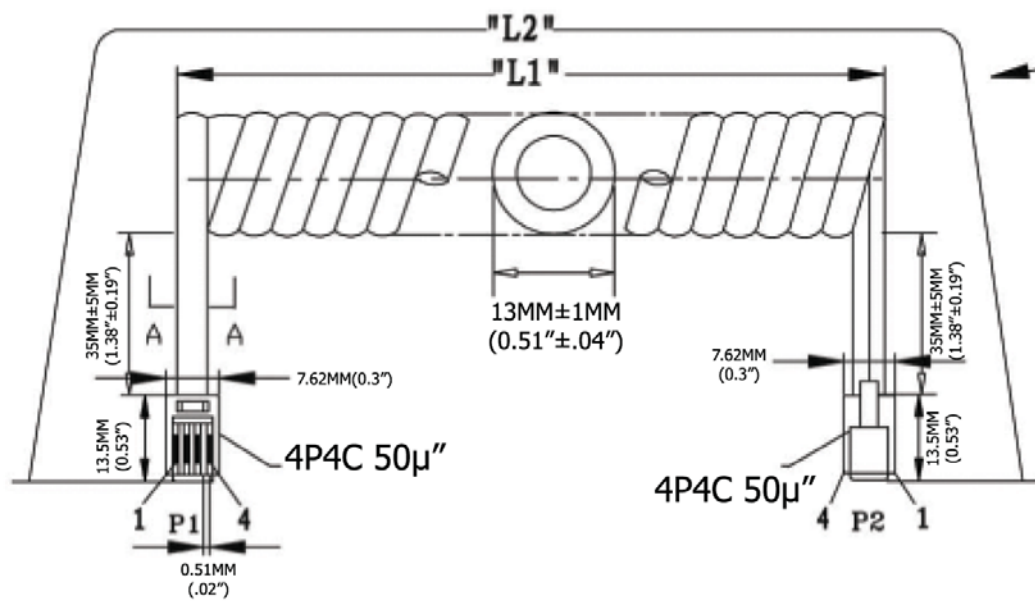

Extended length is with 500g of force

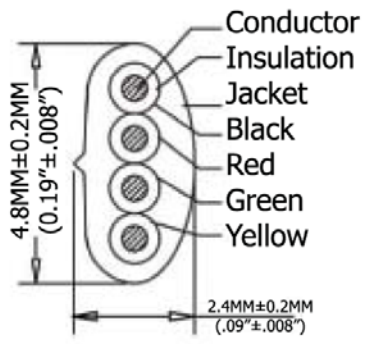

SEC:A-A

TERMINATION:

P1	P2	COLOR
1	4	BLACK
2	3	RED
3	2	GREEN
4	1	YELLOW

Extended Length ("L2")	Typical Retracted Length ("L1")
84.0 Inches - 96.6 Inches	18.5 Inches
2,133.6MM-2,752.64MM	469.9MM

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag



Scale	1:1					Name	Item No.
TOLERANCE					Drawn	11.02.11	<b>AT-C-26-4/4/B-7</b>
X.X	±0.40				Approved	Chappell	
X.XX	±0.25						Title
X.XXX	±0.15						NON-UL 26 AWG (0.12X12)*4C, O.D.: 2.4*4.8MM, Standard Plug, 50µ" of contact plating, BLACK
Angle	±3°						Drawing No.
							<b>rev00</b>
							Replace
							Sheet
		Modification	Date	Name			