


# S505SCH

5 x 20 mm Time-delay, high I<sup>2</sup>t, axial lead, ceramic tube fuses

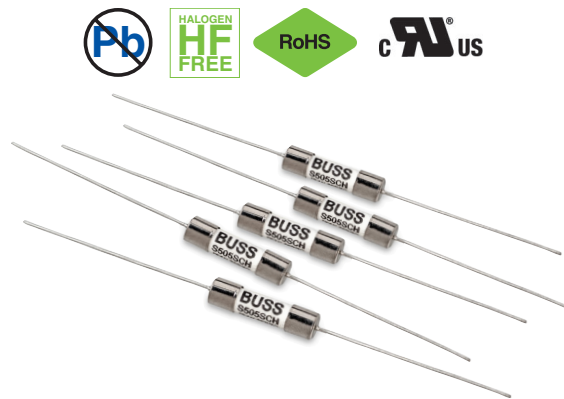

### Product description

- Time-delay, high breaking capacity
- High I<sup>2</sup>t
- Nickel-plated brass end cap construction
- 5 x 20mm physical size
- Halogen free, lead free, RoHS compliant

### Applications

Primary circuit protection:

- Power supplies
- LED lighting
- LED/LCD televisions
- Appliances and white goods
- Printers

### Agency information

- cURus Recognition file number: E19180, Guide JDYX2/JDYX8
- CQC: 14012118443, 14012118444
- KC-Mark: File SU05030-14002
- TUV: R50294952

### Ordering

- Specify packaging prefix and part number as shown

**Packaging prefix**  
BK/

**Part number**  
S505SCH-1-R

### Packaging prefixes

- BK/20 parts in a carrier, 5 carriers in a box
- TR2/1500 parts per reel, tape width 52mm
- TR3/1500 parts per reel, tape width 54mm

**Electrical characteristics**

I <sub>n</sub>	1.5I <sub>n</sub> min minute	2.1I <sub>n</sub> max minute	2.75I <sub>n</sub> min ms	max s	4I <sub>n</sub> min ms	max s	10I <sub>n</sub> min ms	max ms
3.15A	60	30	750	80	95	5	10	150
5A-6.3A	60	30	750	80	150	5	10	150

**Product specifications**

Part number <sup>5</sup>	Voltage rating AC	Interrupting rating at rated voltage (50 Hz) AC <sup>1</sup> (amps)	Typical DC cold resistance (Ω) <sup>2</sup>	Typical pre-arcing I <sup>2</sup> t (A <sup>2</sup> s) <sup>3</sup>	Typical voltage drop (mV) <sup>4</sup>	cURus	KC	CQC	TUV
S505SCH-3.15-R	250	1500	0.017	120	67	x	x	x	x
S505SCH-5-R	250	1500	0.014	160	90	x	x	x	x
S505SCH-6.3-R	250	1500	0.010	330	85	x	x	x	x

1 Interrupting ratings 1A to 10A were measured at 70% to 80% PF on AC.

2 Typical DC cold resistance measured at <10% of rated current .

3. Typical I<sup>2</sup>t value is measured at 10 times the rated current under DC.

4. Typical voltage drop is measured at 20°C ambient temperature at rated current .

5. Part number definition: S505SCH-xxx-R

S505 = Product code


SCH = Single cap- high I<sup>2</sup>t

xxx = Ampere rating


-R = RoHS compliant

**Dimensions—mm**


A
BK: 38.1±0.38
TR2: 15.0 typ
TR3: 16.0 typ

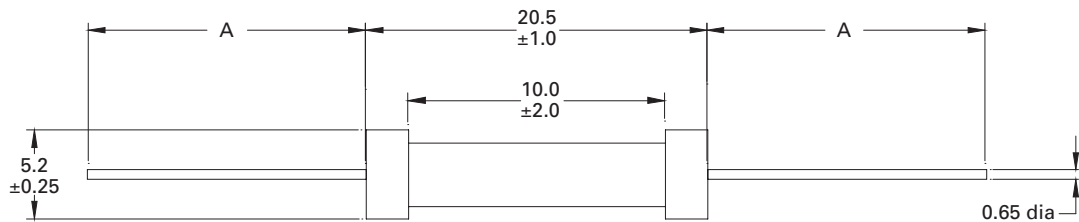


Time vs. current curve

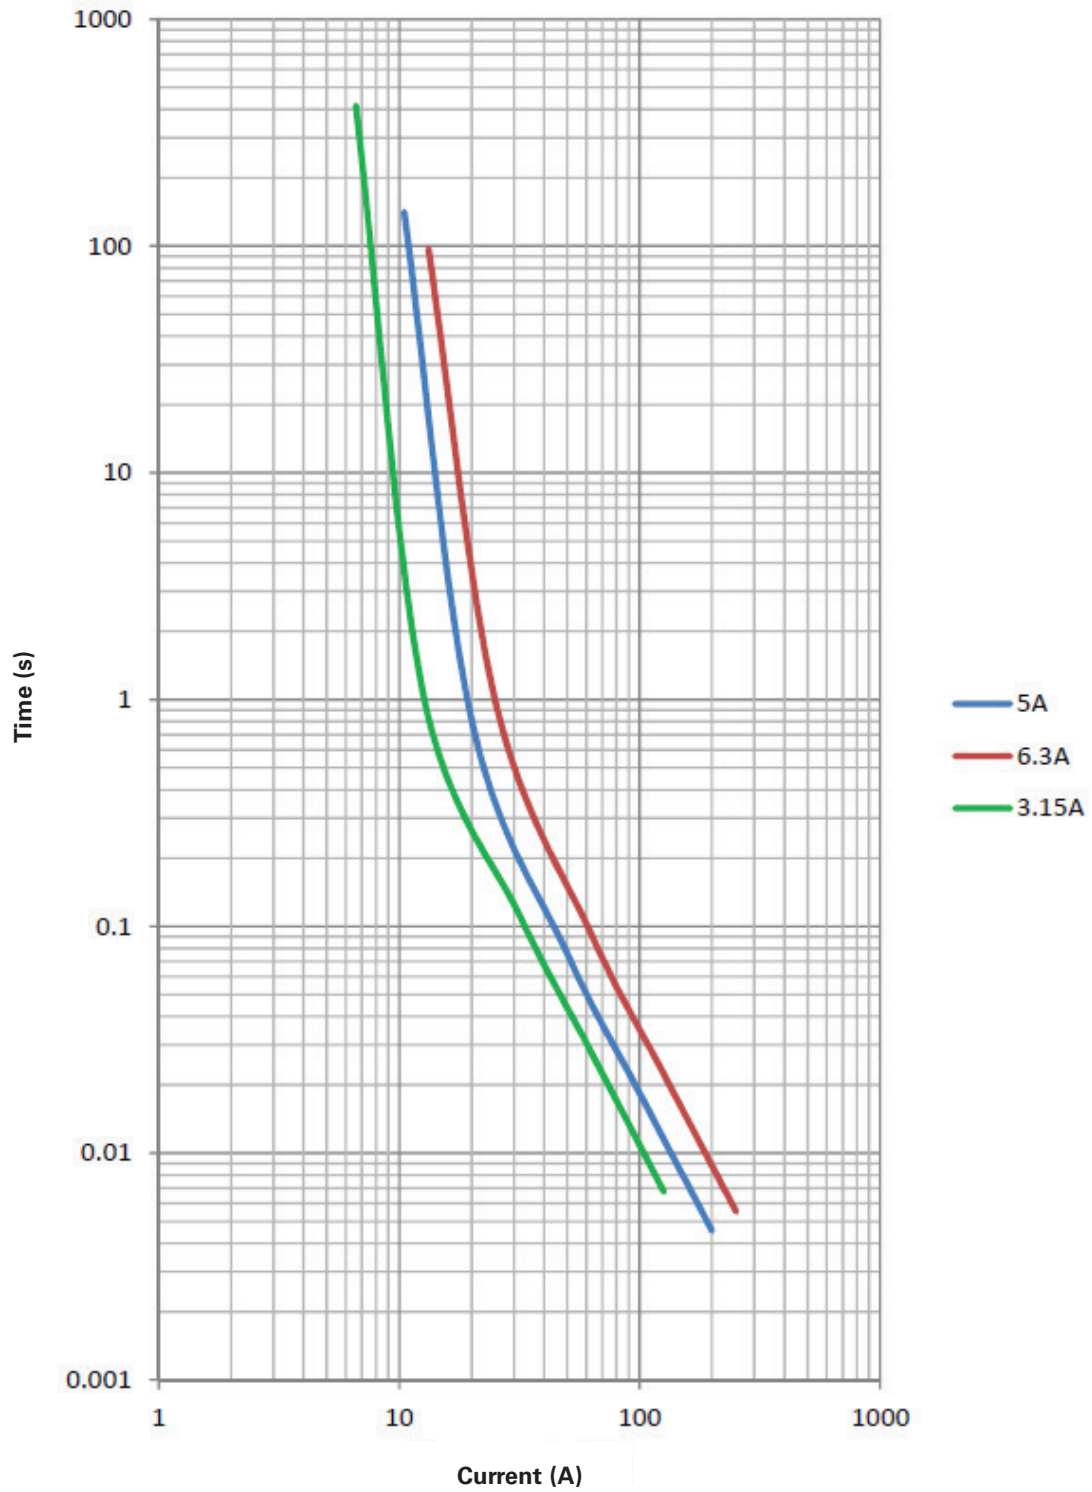


I<sup>2</sup>t vs. current curve

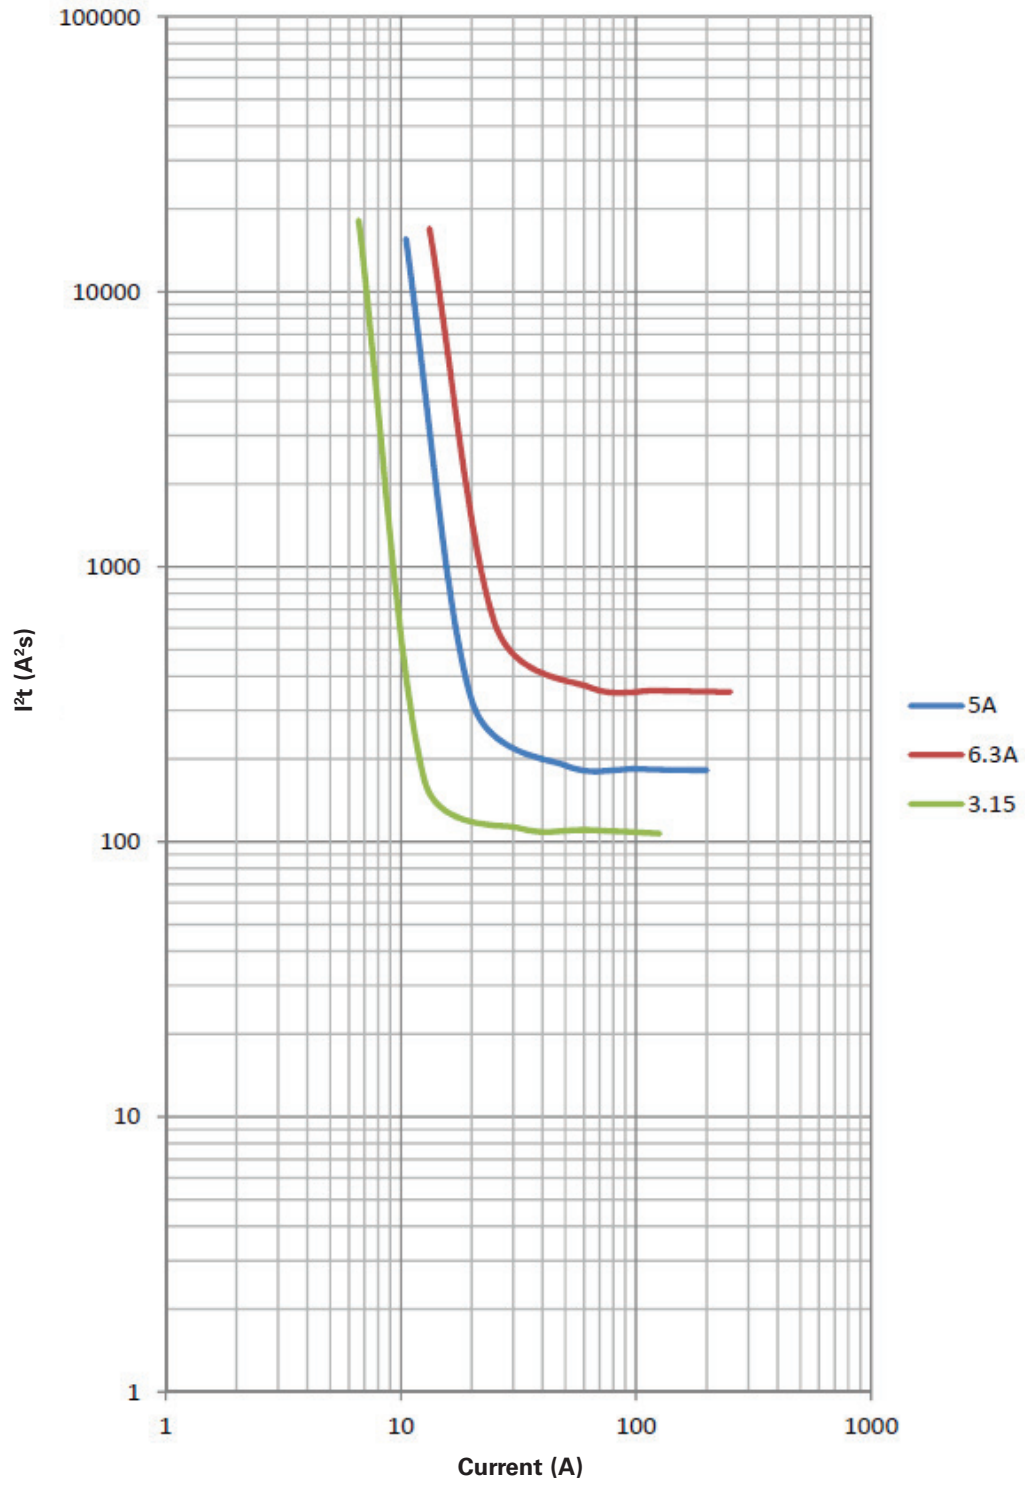

I<sup>2</sup>t vs. time curve

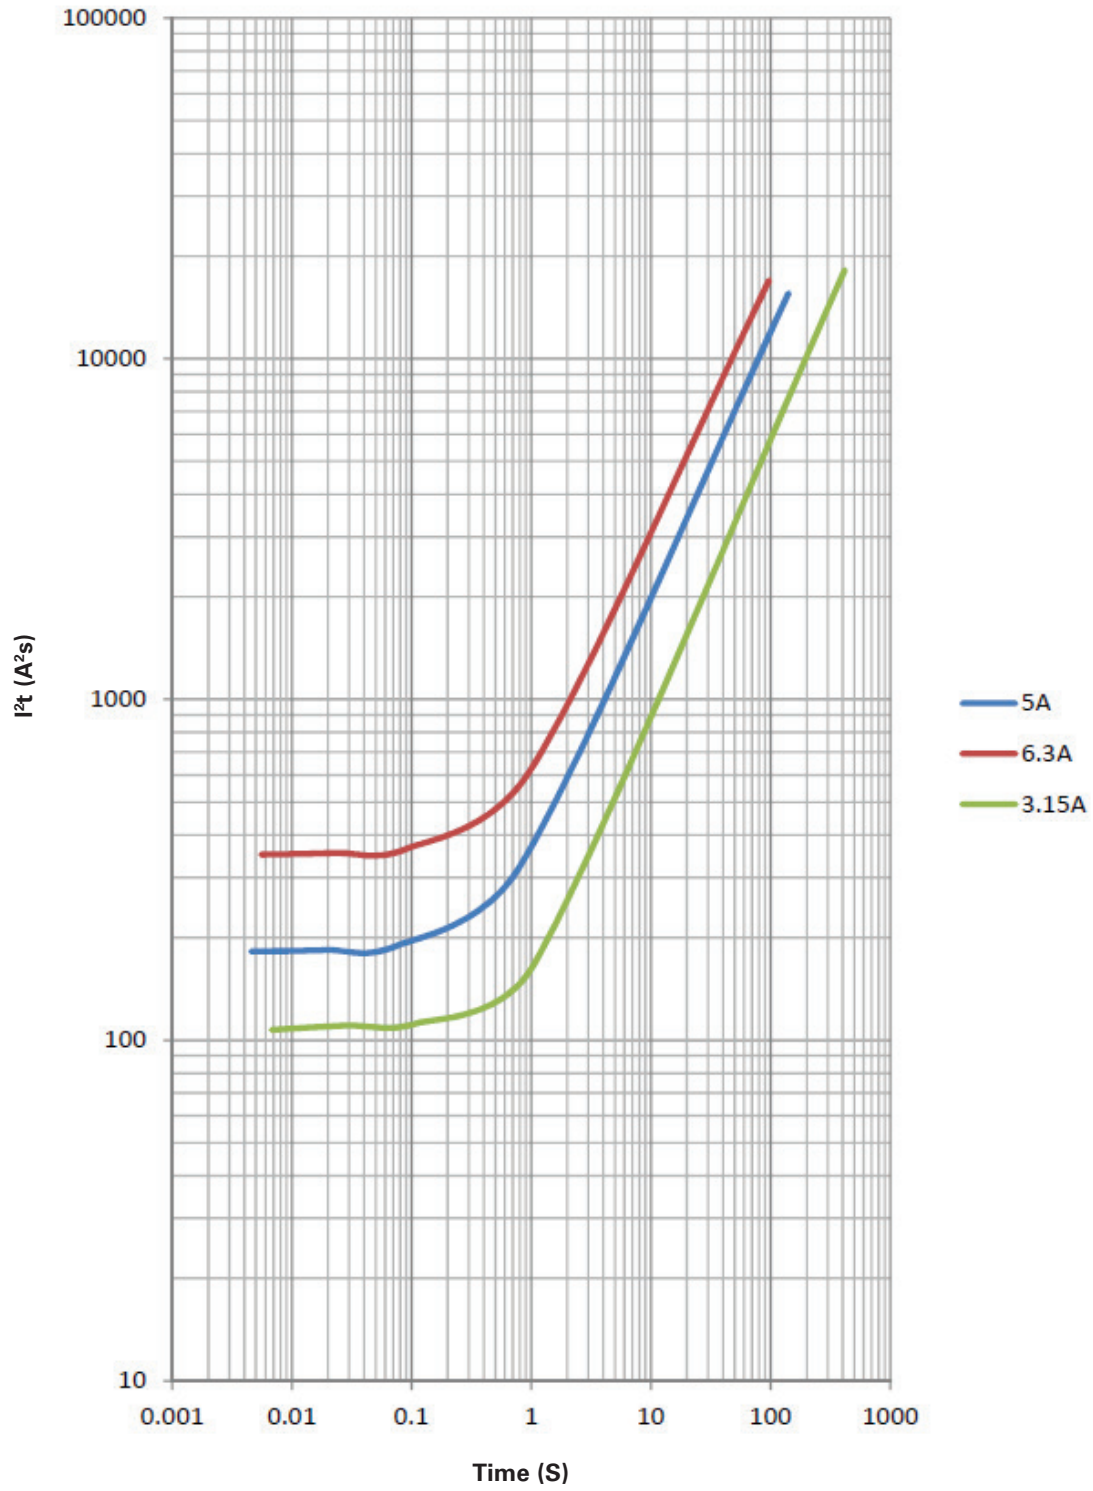

### Temperature derating curve

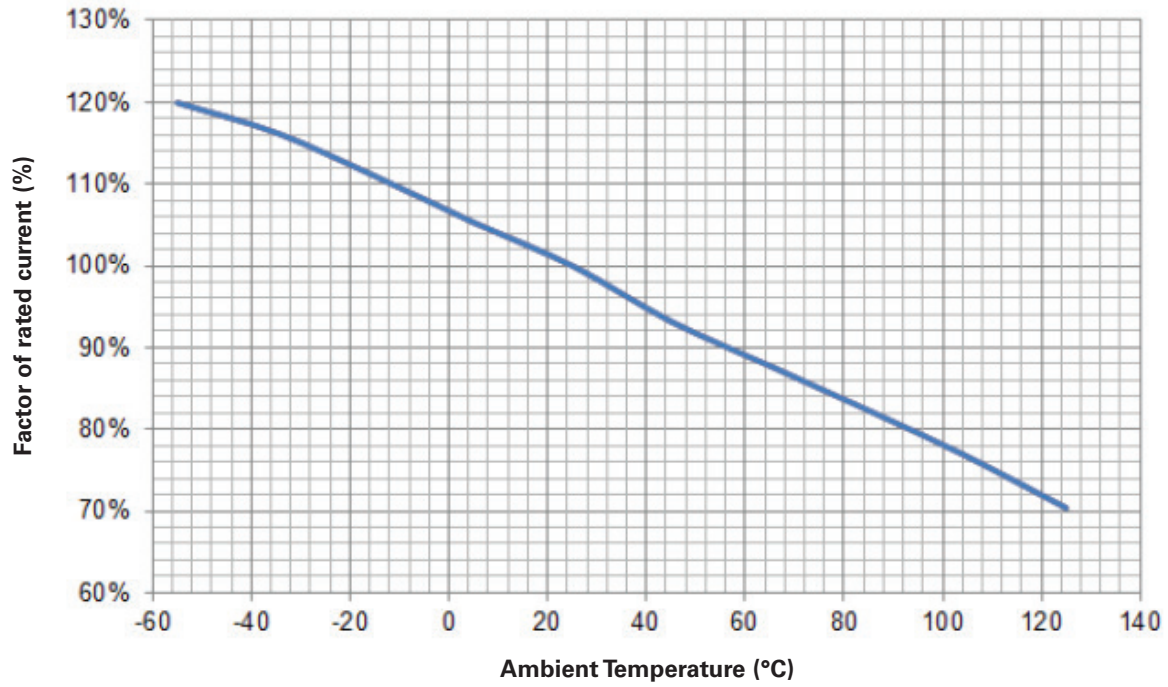

### Environmental data

---

Operating temperature: -55°C to 125°C (with derating)

---

Thermal shock: MIL-STD- 202G, Method 107G, test condition B (5 cycles - 65°C to 125°C)

---

Vibration: MIL-STD- 202G, method 201A

---


Humidity: MIL-STD- 202G, method 103B, test condition A

---

Salt spray: MIL-STD- 202G, method 101E, test condition B

---

**Wave solder profile**

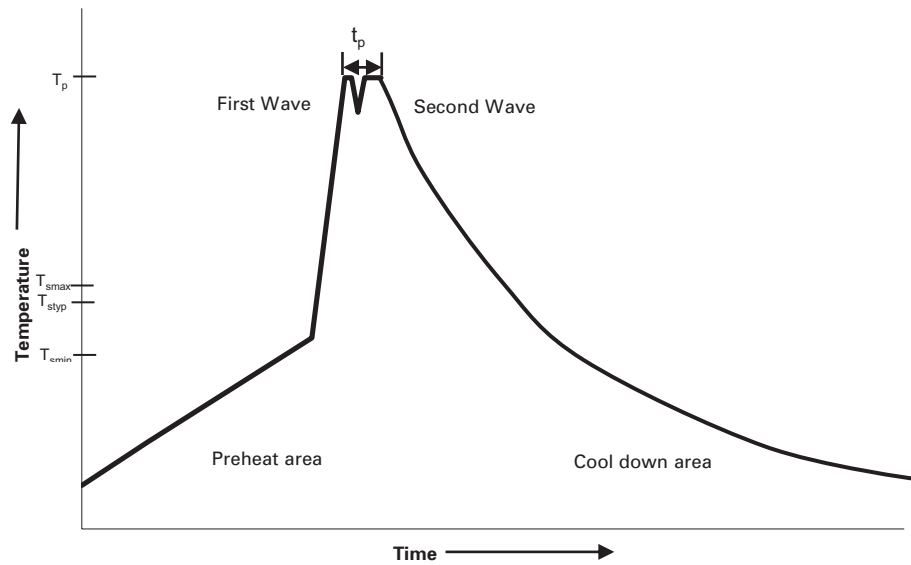

**Reference EN 61760-1:2006**

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat	• Temperature min. (T <sub>smin</sub> )	100°C
	• Temperature typ. (T <sub>styp</sub> )	120°C
	• Temperature max. (T <sub>smax</sub> )	130°C
	• Time (T <sub>smin</sub> to T <sub>smax</sub> ) (t <sub>s</sub> )	70 seconds
Δ preheat to max Temperature	150°C max.	150°C max.
Peak temperature (T <sub>p</sub> )*	235°C – 260°C	250°C – 260°C
Time at peak temperature (t <sub>p</sub> )	10 seconds max 5 seconds max each wave	10 seconds max 5 seconds max each wave
Ramp-down rate	~ 2 K/s min ~3.5 K/s typ ~5 K/s max	~ 2 K/s min ~3.5 K/s typ ~5 K/s max
Time 25°C to 25°C	4 minutes	4 minutes

**Manual solder**

350°C, 4-5 seconds. (by soldering iron), generally manual, hand soldering is not recommended.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
www.eaton.com/elx

© 2015 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 10401 BU-SB15188  
May 2015