


NOTES:

- ① MAT'L: COPPER (STOCK TKN. $\pm .001$)
 - ② PLATING: ELECTRO TIN (.0003 MIN)
 - ③ TIN-PLATED BRASS NON-FUNNEL FERRULE
 - ④ NYLON INSULATION (COLOR CODED YELLOW)
- STUD SIZES: ($\pm .005$)
- | | |
|------------|-----------|
| 02 = .094 | 413 = 413 |
| 04 = .119 | 76 = 453 |
| 06 = .146 | 12 = 515 |
| 08 = .173 | |
| 10 = .198 | |
| 14 = .265 | |
| 56 = .328 | |
| 38 = .390 | |
| 209 = .209 | |
- ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$
- "UL" LISTING # E32244
 "CSA" LISTING # 18689
- WIRE SIZE: 12 - 10 AWG²
 4.0 - 6.0 MM²

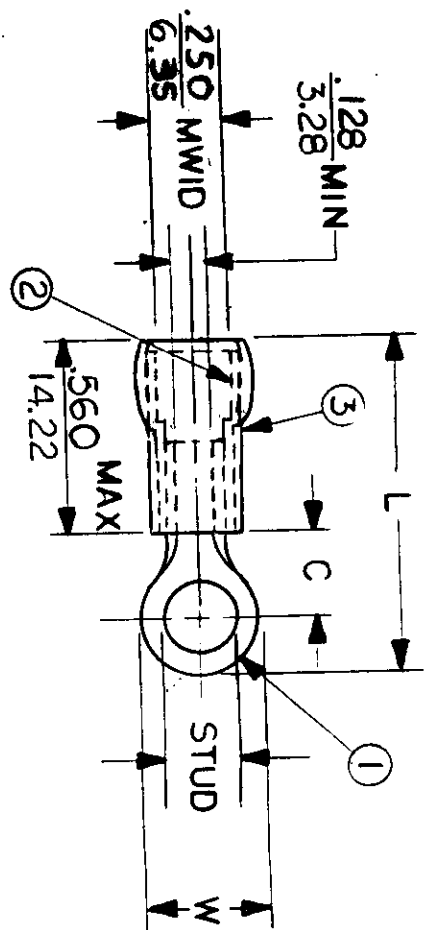

(MVID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	SCALE:	DATE	TITLE:	DWG. NO.	CUSTOMER DWG.
C-801-	.750 19.05	.611 15.51	1.580 40.13	NTS	9-22-87	RING TONGUE TERMINAL AVIKRIMP 800-SERIES	A	
C-828-	.375 9.53	.303 7.70	1.091 27.71	NTS				
C-830-	.530 13.46	.393 9.98	1.258 31.95	NTS				
C-836-	.282 7.16	.306 7.77	1.047 26.59	NTS				
C-840-	.592 15.04	.466 11.83	1.362 34.59	NTS				

