

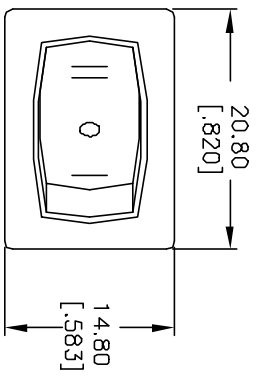




| PANEL THICKNESS | X dimension |
|-----------------------|----------------|
| 0.75-1.25 [0.30-.049] | 19.2-01 [7.56] |
| 1.25-2.0 [0.49-.079] | 19.4-01 [7.64] |
| 2.0-3.0 [0.79-.118] | 19.8-01 [7.80] |

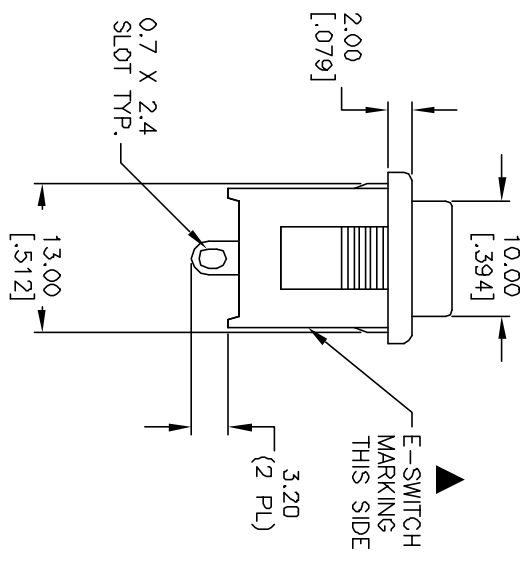

POS. 1

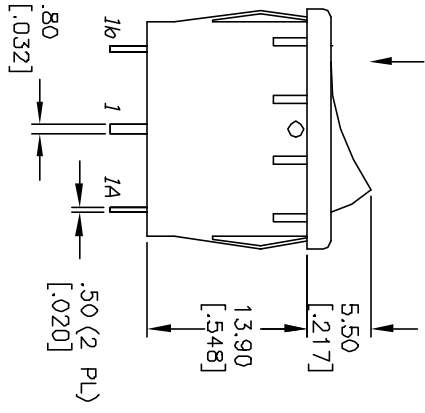

| SWITCH FUNCTION | | |
|-----------------|--------|--------|
| POS. 1 | POS. 2 | POS. 2 |
| DN | NONE | DN |
| 1-1a | OPEN | 1-1b |



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NOS. FOR REF ONLY.
4. RATING: 15A @ 125VAC OR
6A @ 250VAC
5. MATERIALS: TERMINALS: Silver Plated Copper Alloy
CONTACTS: Coin Silver, Silver Plated
6. ELECTRIC LIFE: 10,000 cycles
7. CONTACT RESISTANCE: <20 Mega Ω
8. INSULATION RESISTANCE: >1000 Mega Ω
9. DIELECTRIC STRENGTH: >1500 V 1 minute
>3000 V between poles

E-SWITCH®

| | | | | | | | | | |
|--|--|-------------------|--|-------------------------|--|--------------|--|-------|--|
| REV. A | | 11463 | | RELEASED FOR PRODUCTION | | 5/24/01 | | CJB | |
| REV. ECN No. | | DESCRIPTION | | DATE | | CHKD | | TITLE | |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED | | R1966C BLK BLK BS | | SCALE 1.5:1 | | DATE 5/24/01 | | DR MM | |
| | | M302208 | | DVG | | REV A | | | |