

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V3-3120

CK-X4134

REPLACES X98343-V3

RELEASE NO. PR-21180

CATALOG LISTING
V3-3120
PAGE 1 OF 1

M

ISSUE
2

CHECK

REVISIONS

A	REL	FR21180
	DCS	9 JUN 94



CHECK

CHECK

CHECK

DCS

DDM/CAD
DRAWN
9 MAY 94

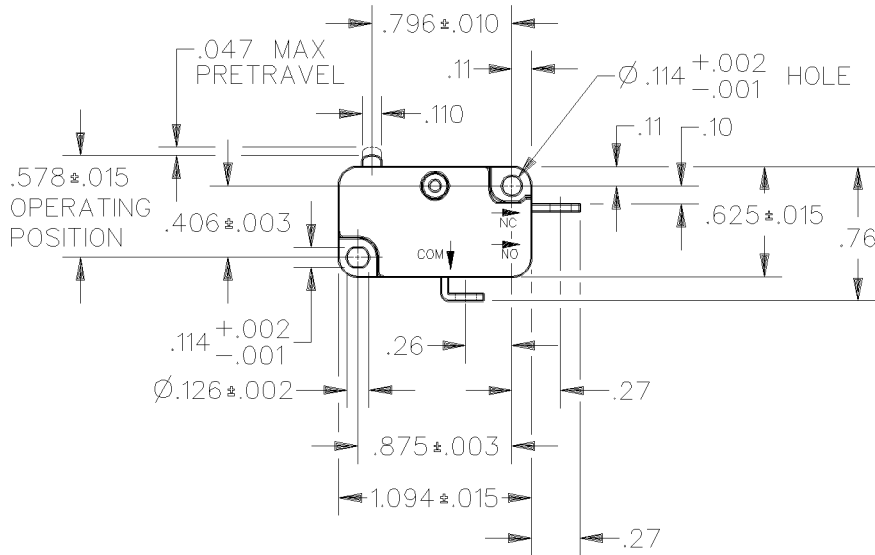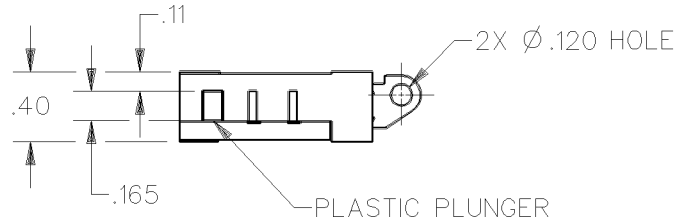

NOTE
1 - TERMINALS ARE SILVER PLATED FOR SOLDERING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA CONTACT ARRANGEMENT S P N C	SCALE FULL	DO NOT SCALE PRINT
		<p>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE</p> <p>ONE PLACE (.0) ±.030</p> <p>TWO PLACE (.00) ±.015</p> <p>THREE PLACE (.000) ±.005</p> <p>ANGLES ±</p> <p>WEIGHT .016 LB</p>	
<p>OPERATING FORCE --- 150 GRAMS MAX</p> <p>RELEASE FORCE --- 15 GRAMS MIN</p> <p>DIFFERENTIAL TRAVEL --- .002-.010</p> <p>OVERTRAVEL --- .050 MIN</p> <p>FREE POSITION --- .625 MAX</p> <p>RELEASE TRAVEL --- .010 MIN</p>	<p>L83 15.1A 1/2HP 125, 250 VAC</p> <p>1/2A 125 VDC, 1/4A 250 VDC</p> <p>5A 125 VAC "L"</p>		