


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: X100W/COLOR HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6. AVAILABLE IN TEN COLORS. CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001 [0.000254] THICK MINIMUM. SPRING: STAINLESS STEEL TYPE 302.

2. P/N: W-200/COLOR 22AWG 65X40 TINNED COPPER 0.070 [1.78] O.D. PVC INSULATION AVAILABLE IN TEN COLORS.

3. PERFORMANCE
 MAXIMUM CURRENT: 2.5 AMPS
 MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
 MAXIMUM TEMPERATURE: 221°F (105°C)

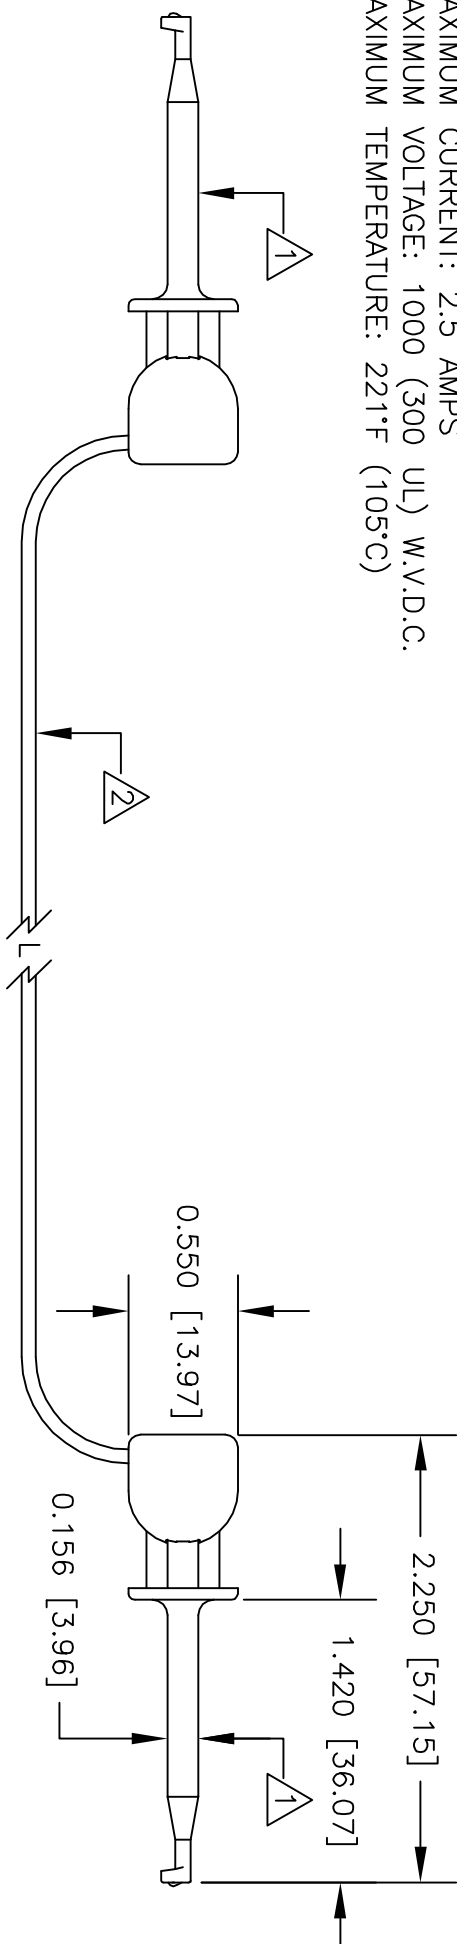

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION	
±	.XX ±	±	±	APPROVALS	EZ-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
±	.XXX ±	±	±	DATE	
±	.XXX ±	±	±	DATE	
MATERIAL SEE NOTE.		DRAWN R.L.		MINI-HOOK (X100W) JUMPER	
FINISH SEE NOTE.		APPROVED BY		SIZE CODE IDENT NO. DRAWING NO.	
USED ON		DO NOT SCALE DRAWING		A 08505 204W	
APPLICATION		DO NOT SCALE DRAWING		SCALE 1:1	
NEXT ASSY		DO NOT SCALE DRAWING		SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EZ-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF EZ-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.