


REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
	12.12.24	A	INITIAL RELEASE.	JORRY
CY13-5884	13.01.11	B	CHG TITLE DESCRIPTION.	JORRY
CY13-5952	13.01.22	C	CHG STRIP LENGTH	JORRY

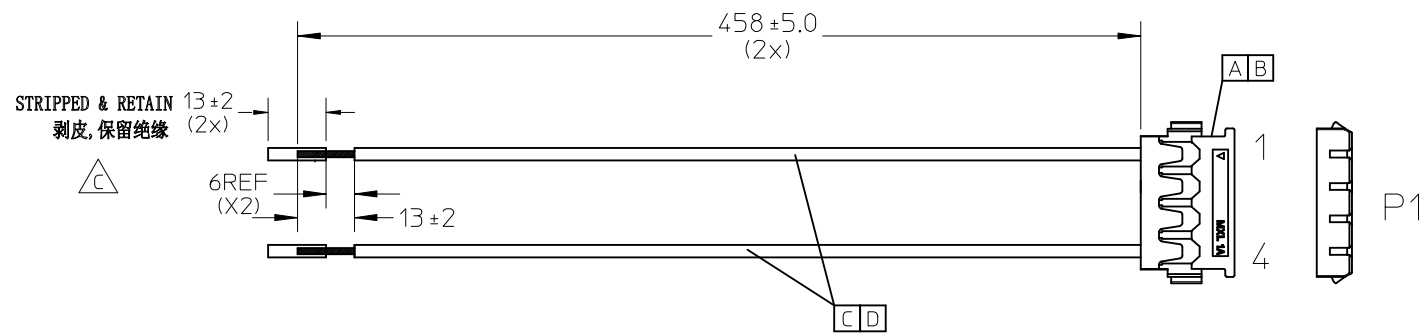

NOTES

1. THIS PRODUCT MUST MEET EU 2011/65/EU ROHS COMPLIANCE.

此产品需符合EU 2011/65/EU ROHS 环保要求

2. ELECTRICAL PERFORMANCE REFER TO ES-000.

电气特性参考ES-000.

3. 28AWG WIRE SPEC.(线的规格)

- 1) WIRE OD:0.7+/-0.05MM,
- 2) WIRE INSULATION: FEP
- 3) CONDUCTOR:7/0.127 TINNED COPPER
- 4)UL STYLE:UL1371
- 5)TEMPERATURE RATING:105℃
- 6) RATED VOLTAGE:300V

4. STICK UL LABEL ON THE OUTSIDE CARTON.

外箱上贴UL 标签

D	28AWG,FEP,RED,OD:0.7MM,UL1371,VW-1.	A/R	
C	28AWG,FEP,BLACK,OD:0.7MM,UL1371,VW-1.	A/R	
B	TERMINAL 28-30AWG		2
A	4CKT HSG.WHITE		1
ITEM	DESCRIPTION	L(MM)	Q'TY

P1	COLOR
1	RED
2	
3	
4	BLACK

EC NO: CPG2013-2384 DRWN: CXIA003 CHKD: JDUAN APPR: FNIE	2013/01/23 2013/01/23 2013/01/24	QUALITY SYMBOLS $\nabla_F = 0$ $\nabla_E = 0$ $\nabla_P = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
			4 PLACES	± ---	± ---	DRAWN BY CXIA003	DATE 2012/12/25	TITLE 2PINS WIRING PICO EZMATE 18" 28AWG	
			3 PLACES	± ---	± ---	CHECKED BY JDUAN	DATE 2012/12/25		
			2 PLACES	± ---	± ---	APPROVED BY FNIE	DATE 2012/12/26		
			1 PLACE	± ---	± ---	MATERIAL NO. 688014227		DOCUMENT NO. SD-68801-092	
			0 PLACE	± ---	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SHEET NO. 1 OF 1	
			ANGULAR ± ---°		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				