


## Specification Sheet

Part Number: T120MR9H4

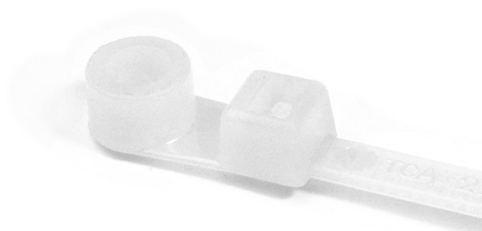

Screw-Mount Cable Tie, 15.6" Long, #1/4 Screw, 4.02" Max Bundle Dia, 120lb, PA66, Natural, 500/pkg

|                                |  |
|--------------------------------|--|
| <b>Article Number</b>          | 113-00018  |
| <b>Type</b>                    | T120MR   |
| <b>Color</b>                   | Natural (NA)   |
| <b>Features &amp; Benefits</b> | <ul style="list-style-type: none"><li>•Screw mount style creates low insertion and high extraction force.</li><li>•Choose from several tensile strengths and lengths to accommodate a range of applications.</li></ul> |
| <b>Quantity Per</b>            | bag  |
| <b>Product Description</b>     | One-piece Screw Mount Cable Ties fasten with a screw or bolt to provide secure routing of cable bundles. Multiple configurations are available to cover a range of bundle sizes and tensile strengths.                 |
| <b>Short Description</b>       | Screw-Mount Cable Tie, 15.6" Long, #1/4 Screw, 4.02" Max Bundle Dia, 120lb, PA66, Natural, 500/pkg   |

Global Part Name

T120MR-PA66-NA

Minimum Tensile Strength (Imperial)

120.0

Minimum Tensile Strength (Metric)

535

Length L (Imperial)

15.6

Length L (Metric)

395.0

Fixation Method

Fixing hole

Identification Plate Position

none

Releasable Closure

No

Tie Closure

plastic pawl

Variant

Inside Serrated

Width W (Imperial)

0.3

Width W (Metric)

7.6

Bundle Diameter Min (Imperial)

0.2

Bundle Diameter Min (Metric)

5.0

Bundle Diameter Max (Imperial)

4.0

Bundle Diameter Max (Metric)

102.0

Thickness T (Imperial)

0.07

|  |                                  |
|--|----------------------------------|
| <b>Thickness T (Metric)</b>                  | 1.8                              |
| <b>Height H (Imperial)</b>                   | .31                              |
| <b>Height H (Metric)</b>                     | 7.90                             |
| <b>Mounting Hole Diameter D (Imperial)</b>   | 0.26                             |
| <b>Mounting Hole Diameter D (Metric)</b>     | 6.5 mm                           |
| <b>Mounting Hole Diameter D Max (Metric)</b> | 6.5                              |
| <b>Material</b>                              | Polyamide 6.6 (PA66)             |
| <b>Material Shortcut</b>                     | PA66                             |
| <b>Flammability</b>                          | UL 94 V2                         |
| <b>Operating Temperature (Metric)</b>        | -40°F to +185°F (-40°C to +85°C) |
| <b>ROHS Complaint</b>                        | Yes                              |
| <b>UL Recognized (US)</b>                    | Yes                              |
| <b>UL Recognized (US and Canada)</b>         | Yes                              |
| <b>Package Quantity(Imperial)</b>            | 500                              |
| <b>Package Quantity (Metric)</b>             | 500                              |

**Customs Number**

3926909987

---

© 2018 HellermannTyton. All rights reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)