



MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL


FED. MFG. CODE 91929

SWITCH-BASIC


CATALOG LISTING

V3L-22

CQ-A2200

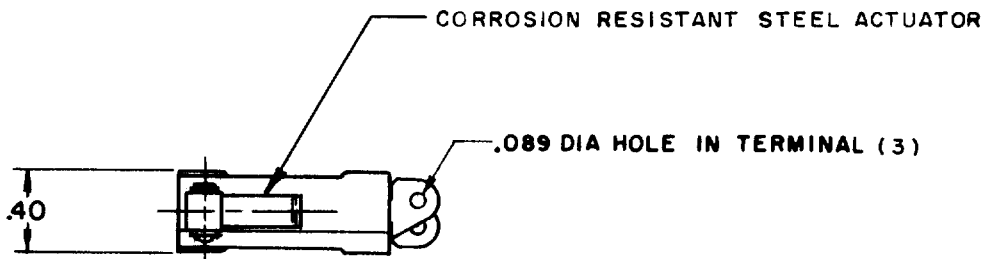

.19 DIA X .19 WIDE OIL BRONZE ROLLER
(CONCENTRICITY .005 T I R)

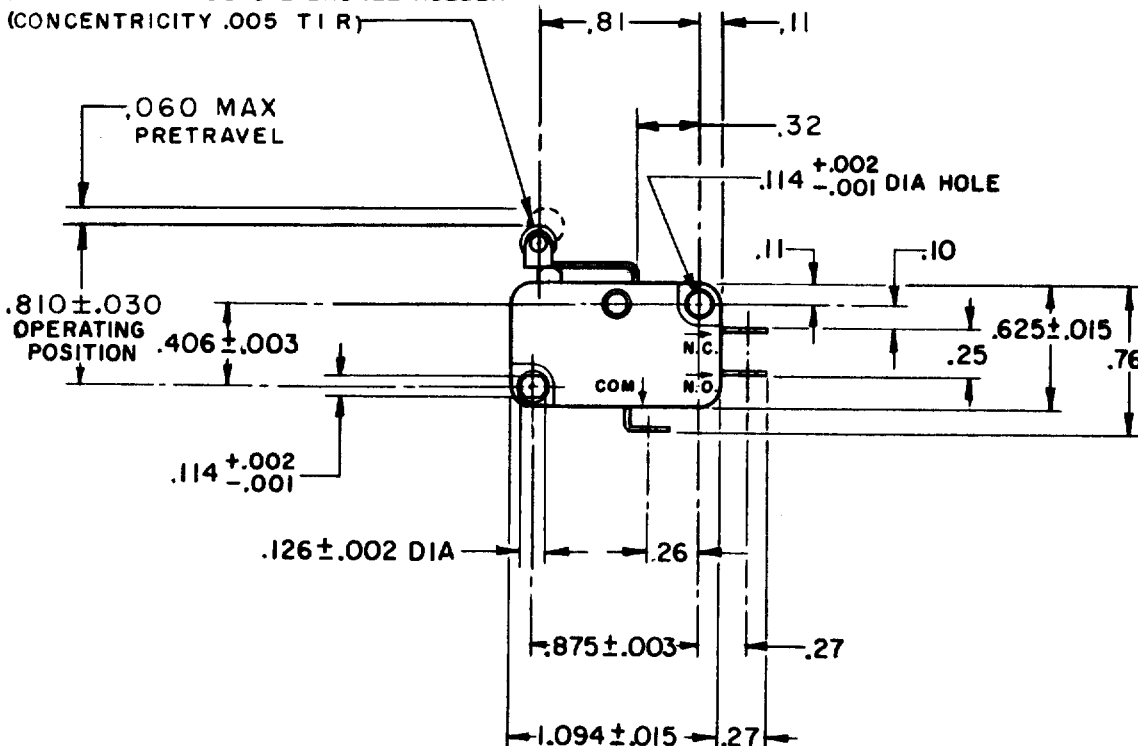

NOTE -
1- TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — 14 OZ MAX

RELEASE FORCE — — — 3 OZ MIN

DIFFERENTIAL TRAVEL — — — .016 MAX

OVERTRAVEL — — — .040 MIN

RELEASE TRAVEL — — — .007 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L83
15.1A 1/2HP 125 OR 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
5A 125 VAC "L"



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

| | | |
|-------------|--------|-------|
| ONE PLACE | (.0) | ±.030 |
| TWO PLACE | (.00) | ±.015 |
| THREE PLACE | (.000) | ±.003 |
| ANGLES | | ± |

WEIGHT

V3L-22

M

DRAWING NUMBER

ISSUE

4

REPLACES

SR12837

RELEASE NO.

CHECK

REVISIONS

A C031609
22 JAN 73
B 3097
1 OCT 83
C 76305
30 NOV 93

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

FO-50378

DRAWN

M B F

5 MAY 67