

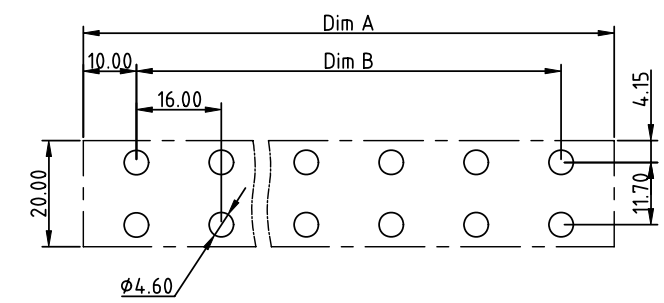
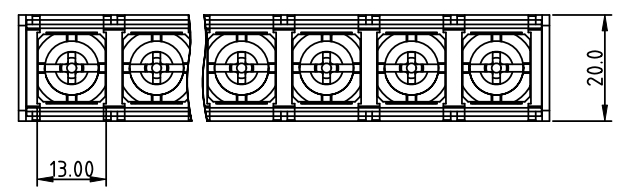
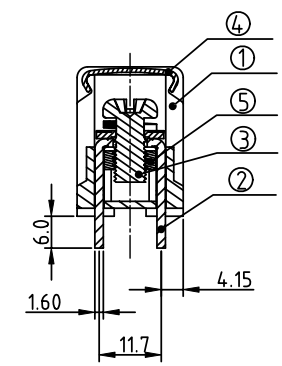


PRODUCT NUMBER	PITCH
YK902xx2x0JOG	16.00mm

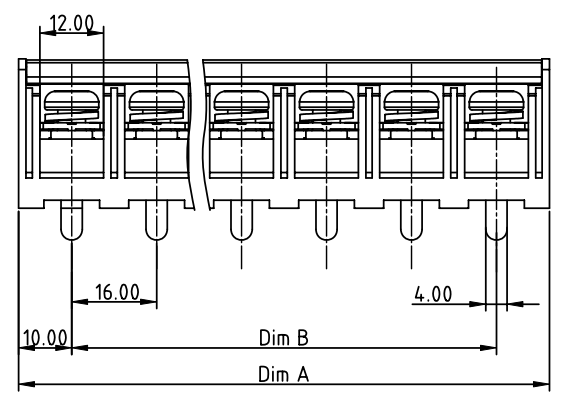

RECOMMENDED P.C.B LAYOUT  
TOP VIEW



- MATERIALS & ELECTRICAL**
- |                                 |                                     |
|---------------------------------|-------------------------------------|
| RATED VOLTAGE & CURRENT:        | 600 V, 65A                          |
| WITHSTAND VOLTAGE:              | AC 3000 V/Min                       |
| INSULATION RESISTANCE:          | 1000 M $\Omega$ OR MORE AT DC 500 V |
| OPERATING TEMPERATURE RANG:     | -40 °C ~ +115°C                     |
| SCREW TORQUE VALUE:             | 26 Lb-In.                           |
| WIRE RANGE:                     | 10 - 6 AWG                          |
| 1) HOUSING:                     | THERMOPLASTICS, UL94-V0 BLACK       |
| 2) TERMINAL:                    | BRASS, 1.6t                         |
| 3) TERMINAL SCREWS WITH WASHER: | STEEL, M6.0                         |
| 4) TERMINAL NUT:                | STEEL, M6.0, NICKEL PLATED          |
| 5) COVER:                       | PC                                  |
- APPROVAL: us


DIMENSION

Dim A	$N \times 16.0 + 4.0$
Dim B	$(N-1) \times 16.0$

N=Number of poles

Poles	Tolerance
2p-6p	$\pm 0.40$
7p-10p	$\pm 0.50$

PART NO.: YK 902xx 2 x 0 JOG

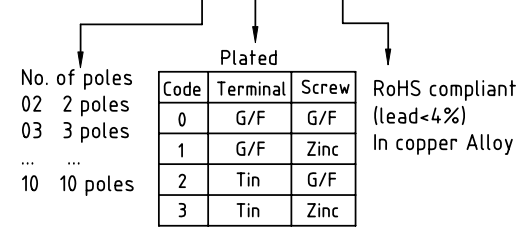

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection	product family
ltr	ecn no	dr	date		TERMINAL BLOCK
				MM	title
				scale	TERMINAL BLOCK
				dr	BARRIER TYPE, WITH COVER
				enr	dwg no
				chr	sheet 1 of 1
				appd	size
					YK902xx2x0JOG
				type	A4
					CUSTOMER Drawing
sheet index	revision	A			
	sheet	1			