

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 30COLOR
HOUSING: MOLDED NYLON 6 OR 6.6. AVAILABLE IN TEN COLORS.

CONTACT TIP: STEEL. BRIGHT NICKEL FINISH.

2. P/N: 9214COLOR


HOUSING: MOLDED ACETAL. AVAILABLE IN BLACK OR RED.
FRAME: BRASS. NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.

3. P/N: W-600/COLOR

18 AWG 65X36 TINNED COPPER INSULATION
PVC 0.144 [3.66] NOMINAL O.D.
AVAILABLE IN TEN COLORS.

4. PERFORMANCE

MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

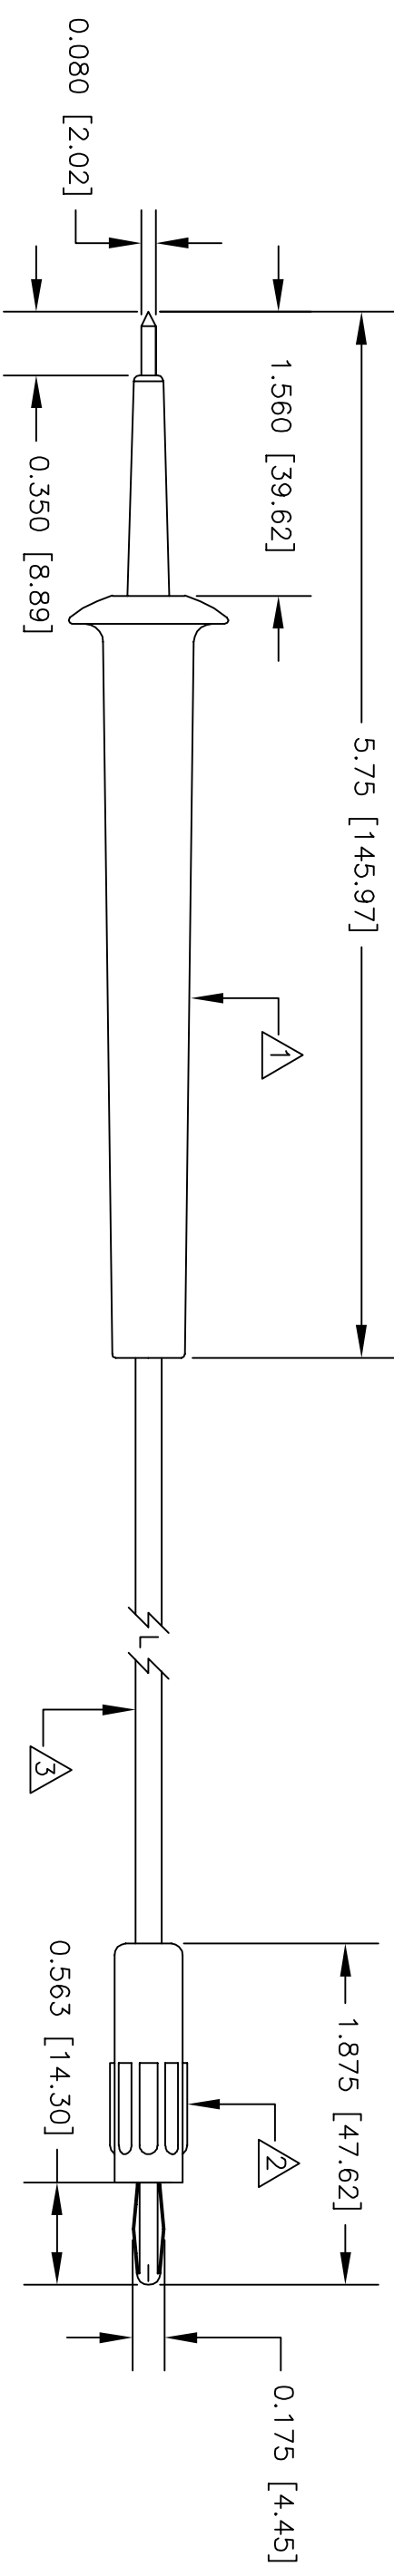

REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
± .XX ±	± .XXX ±	APPROVALS	DATE
±	±	R.L.	11/10
MATERIAL SEE NOTE.		APPROVED BY	
FINISH SEE NOTE.			
NEXT ASSY USED ON			
APPLICATION		DO NOT SCALE DRAWING	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.

EZ-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.

DESCRIPTION: PROBE (30) TO STD BAN PLUG (9214)

SIZE CODE IDENT NO. DRAWING NO. B 08505 658

SCALE 1:1 SHEET 1 OF 1