

PART NUMBER	REV	FIRST USED
567878-1	B	854040-4

TERMINAL NAME: TERMINAL, PIN 6		CRIMP DATA (NON-AMP TERM-CUST SPEC)				
AMP P/N	MFG P/N	CRIMP HEIGHT	WIRE SIZE			
286840	MX10-56-PC2-1-5000	A .042 ±.002 [1.075 ±0.05mm]	0.5 mm ²			
		B .041 ±.002 [1.05 ±0.05mm]	0.5 mm ²			
		C .040 ±.002 [1.035 ±0.05mm]	0.5 mm ²			
		D .040 ±.002 [1.025 ±0.05mm]	0.5 mm ²			
WIRE STRIP LENGTH		TERM APPL SPEC	FEED	APPL INSTRUCTION	SET UP GAGE	LAYOUT
.136-.152		NONE	.311	SEE CUSTOMER MANUAL	NONE	L2311

STANDARD FORCE CRIMP QUALITY MONITOR APPLICATOR
SIM TO HDM NONE

QTY	REV	REF	DESCRIPTION	ITEM NO	
1	-	A	2-21010-7	SCR, SET (6-32x.12) LIFT ARM	67
1	-	B	1-21002-6	SCR, BHC (6-32x.25) LEVER	66
1	-	B	856044-1	LEVER, SLIDE LOCK	65
1	-	A	2-21000-0	SCR, SHC (6-32x.50) LIFT ARM	64
1	-	B	856043-1	ARM, LIFT	63
1	-	A	2-21000-6	SCR, SHC (8-32x.38) EXT ARM	62
1	-	B	856042-1	ARM, EXTENSION	61
					60
					59
					58
1	-	A	7-21013-3	SCR, SET (5/16x.38) CR BOLT	57
REF	-	B	694433-8	PAWL, FEED	56
					55
					54
					53
					52
1	-	A	811242-2	BUMPER, HOLDDOWN	51
1	-	A	690753-1	SPACER, TONKER	50
					49
1	-	A	690602-6	CAM, PRE-FEED 1.62 STROKE	48
					47
					46
1	-	A	690191-1	PLUG, NYLON	45
1	-	C	853493-4	SIDE FEED RAM ASSY	44
1	-	A	690125-1	WASHER, LAMINATED	43
1	-	A	690124-1	WASHER, RAM	42
1	-	A	7-21002-9	BOLT, CRIMPER (5/16x1.00)	41
1	-	A	23241-6	BALL, STEEL	40
1	-	A	690170-1	SPRING, COMPRESSION	39
1	-	C	690142-3	DISC, INSULATION	38
1	-	D	354777-1	WIRE DISC, PLASTIC	37
1	-	A	22480-5	WASHER, SPRING	36
1	-	B	856041-1	POST, RAM	35
1	-	B	690786-1	SUPPORT, TERMINAL	34
1	-	C	462544-1	PLATE, BASE SPECIAL	33
1	-	A	690432-3	SCREW, ADJUSTMENT	32
1	-	B	462543-1	BLOCK, SCREW SPECIAL	31
1	-	B	455689-1	BLOCK, STRIP GUIDE ADJ	30
1	-	C	455671-1	PLATE, STRIP GUIDE	29
1	-	C	455888-8	SPACER, FRONT SHEAR DEP	28
2	-	A	1-22284-0	SPRING, DRAG	27
1	-	B	690546-1	LEVER, DRAG RELEASE	26
1	-	B	240792-1	DRAG, TERMINAL	25
1	-	D	5-690504-9	GUIDE, STRIP (REAR)	24
1	-	A	690438-1	GUIDE, STRIP (FRONT)	23
					22
1	-	A	463756-1	GUIDE, SCRAP	21
1	-	A	904275-1	SUPPORT, SPRING	20
REF	-	C	462615-1	STRIPPER	19
					18
					17
					16
					15
					14
					13
1	-	A	6-22279-4	SPRING, SHEAR	12
1	-	B	1-690461-6	STOP, SHEAR (FRONT)	11
1	-	B	462548-3	HOLDER, SHEAR (FRONT) SP	10
1	-	B	462547-3	SHEAR, FLOAT (FRONT) SP	9
1	-	C	3-662520-2	ANVIL	8
1	-	C	1-240641-4	SPACER, DEPRESSOR (REAR)	7
					6
1	-	A	462838-1	DEPRESSOR, SHEAR (FRONT) SP	5
1	-	B	2-238011-2	SPACER, BLOCK CRIMPER	4
1	-	C	5-456134-4	CRIMPER, INSULATION	3
1	-	C	455888-5	SPACER, CRIMPER	2
1	-	C	5-568176-1	CRIMPER, WIRE	1


QTY	REV	REF	DESCRIPTION	ITEM NO	
2	-	C	5-354779-2	PIN, WIRE DISC (.3250)D	129
2	-	C	5-354779-0	PIN, WIRE DISC (.3240)C	128
2	-	C	5-354779-4	PIN, WIRE DISC (.3260)B	127
2	-	C	5-354779-4	PIN, WIRE DISC (.3260)A	126
1	-	A	986950-1	WASHER, FLAT PRECISION	125
1	-	A	217238-4	DOCUMENTATION PACKAGE	124
					123
					122
1	-	A	4-21028-0	PIN, SLT SPR (ø.093x.75) ST 60E PL	121
1	-	B	690701-2	PLATE, SERIAL NO.	120
2	-	A	21899-2	WASHER, FLAT (#10) 5 G ADJ BLK	119
					118
2	-	A	21024-5	WASHER, LOCK (#10) ADJ BLOCK	117
					116
					115
2	-	A	21024-2	WASHER, LOCK (#4) FRONT STP GUIDE	114
REF	-	A	21024-4	WASHER, LOCK (#8) FEED FINGER	113
2	-	A	21024-4	WASHER, LOCK (#8) DEP-HOLD	112
REF	-	A	21024-4	WASHER, LOCK (#8) STRIPPER	111
					110
					109
1	-	A	21018-5	NUT, HEX (#6) HOLD DOWN	108
					107
					106
					105
1	-	A	21009-2	SCR, SKT 5ET (1/4-20x.25 LW) RAM	104
					103
					102
4	-	A	21017-2	SCR, DRIVE (#2x.19) ID PLATE	101
1	-	B	819347-1	PLATE, IDENTIFICATION	100
2	-	A	3-21002-0	SCR, BHC (10-32x.88) DRAG	99
1	-	A	22733-8	SCR, BHC (8-32x.38 LW) ANVIL	98
					97
1	-	A	3-21000-8	SCR, SHC (10-32x.88) MOUNTING	96
1	-	A	2-21002-7	SCR, BHC (10-32x.50) 5G ADJ BLK	95
6	-	A	2-21002-2	SCR, BHC (8-32x.50) SHEAR-TERM SUP	94
					93
					92
1	-	A	1-21002-7	SCR, SHC (6-32x.50) CAM	91
2	-	A	2-21000-7	SCR, SHC (8-32x.50) SCR BLK	90
					89
					88
2	-	A	2-21000-9	SCR, SHC (8-32x.75) DEP-HOLD DOWN	87
REF	-	A	2-22603-0	SCR, HEX HD (8-32x.31) FEED FINGER	86
2	-	A	1-21000-3	SCR, SHC (4-40x.25) F ST GUIDE	85
REF	-	A	22733-9	SCR, BHC (8-32x.50 SL) STRIPPER	84
					83
					82
1	-	A	3-22603-1	SCR, HEX (10-32x.38) 5G ADJ BL	81
					80
					79
					78
2	-	B	463310-6	BLADE, STRIPPING (#22)	77
-	-	D	354440-3	FFC LOOP ASSY	76
					75
1	-	A	690603-1	SPRING, ASSIST	74
1	-	A	23030-1	SCR, SKT CAP (6-32x.25) CP DSC	73
					72
2	-	B	853495-1	GASKET	71
					70
					69
					68
					67
					66
					65
					64
					63
					62
					61
					60
					59
					58
					57
					56
					55
					54
					53
					52
					51
					50
					49
					48
					47
					46
					45
					44
					43
					42
					41
					40
					39
					38
					37
					36
					35
					34
					33
					32
					31
					30
					29
					28
					27
					26
					25
					24
					23
					22
					21
					20
					19
					18
					17
					16
					15
					14
					13
					12
					11
					10
					9
					8
					7
					6
					5
					4
					3
					2
					1

QTY	REV	REF	DESCRIPTION	ITEM NO	
-1	U/M	DWG SIZE	PART NO	DESCRIPTION	ITEM NO

QTY	REV	REF	DESCRIPTION	ITEM NO	
-1	U/M	DWG SIZE	PART NO	DESCRIPTION	ITEM NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS DRAWING IS UNRELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL RIGHTS RESERVED.

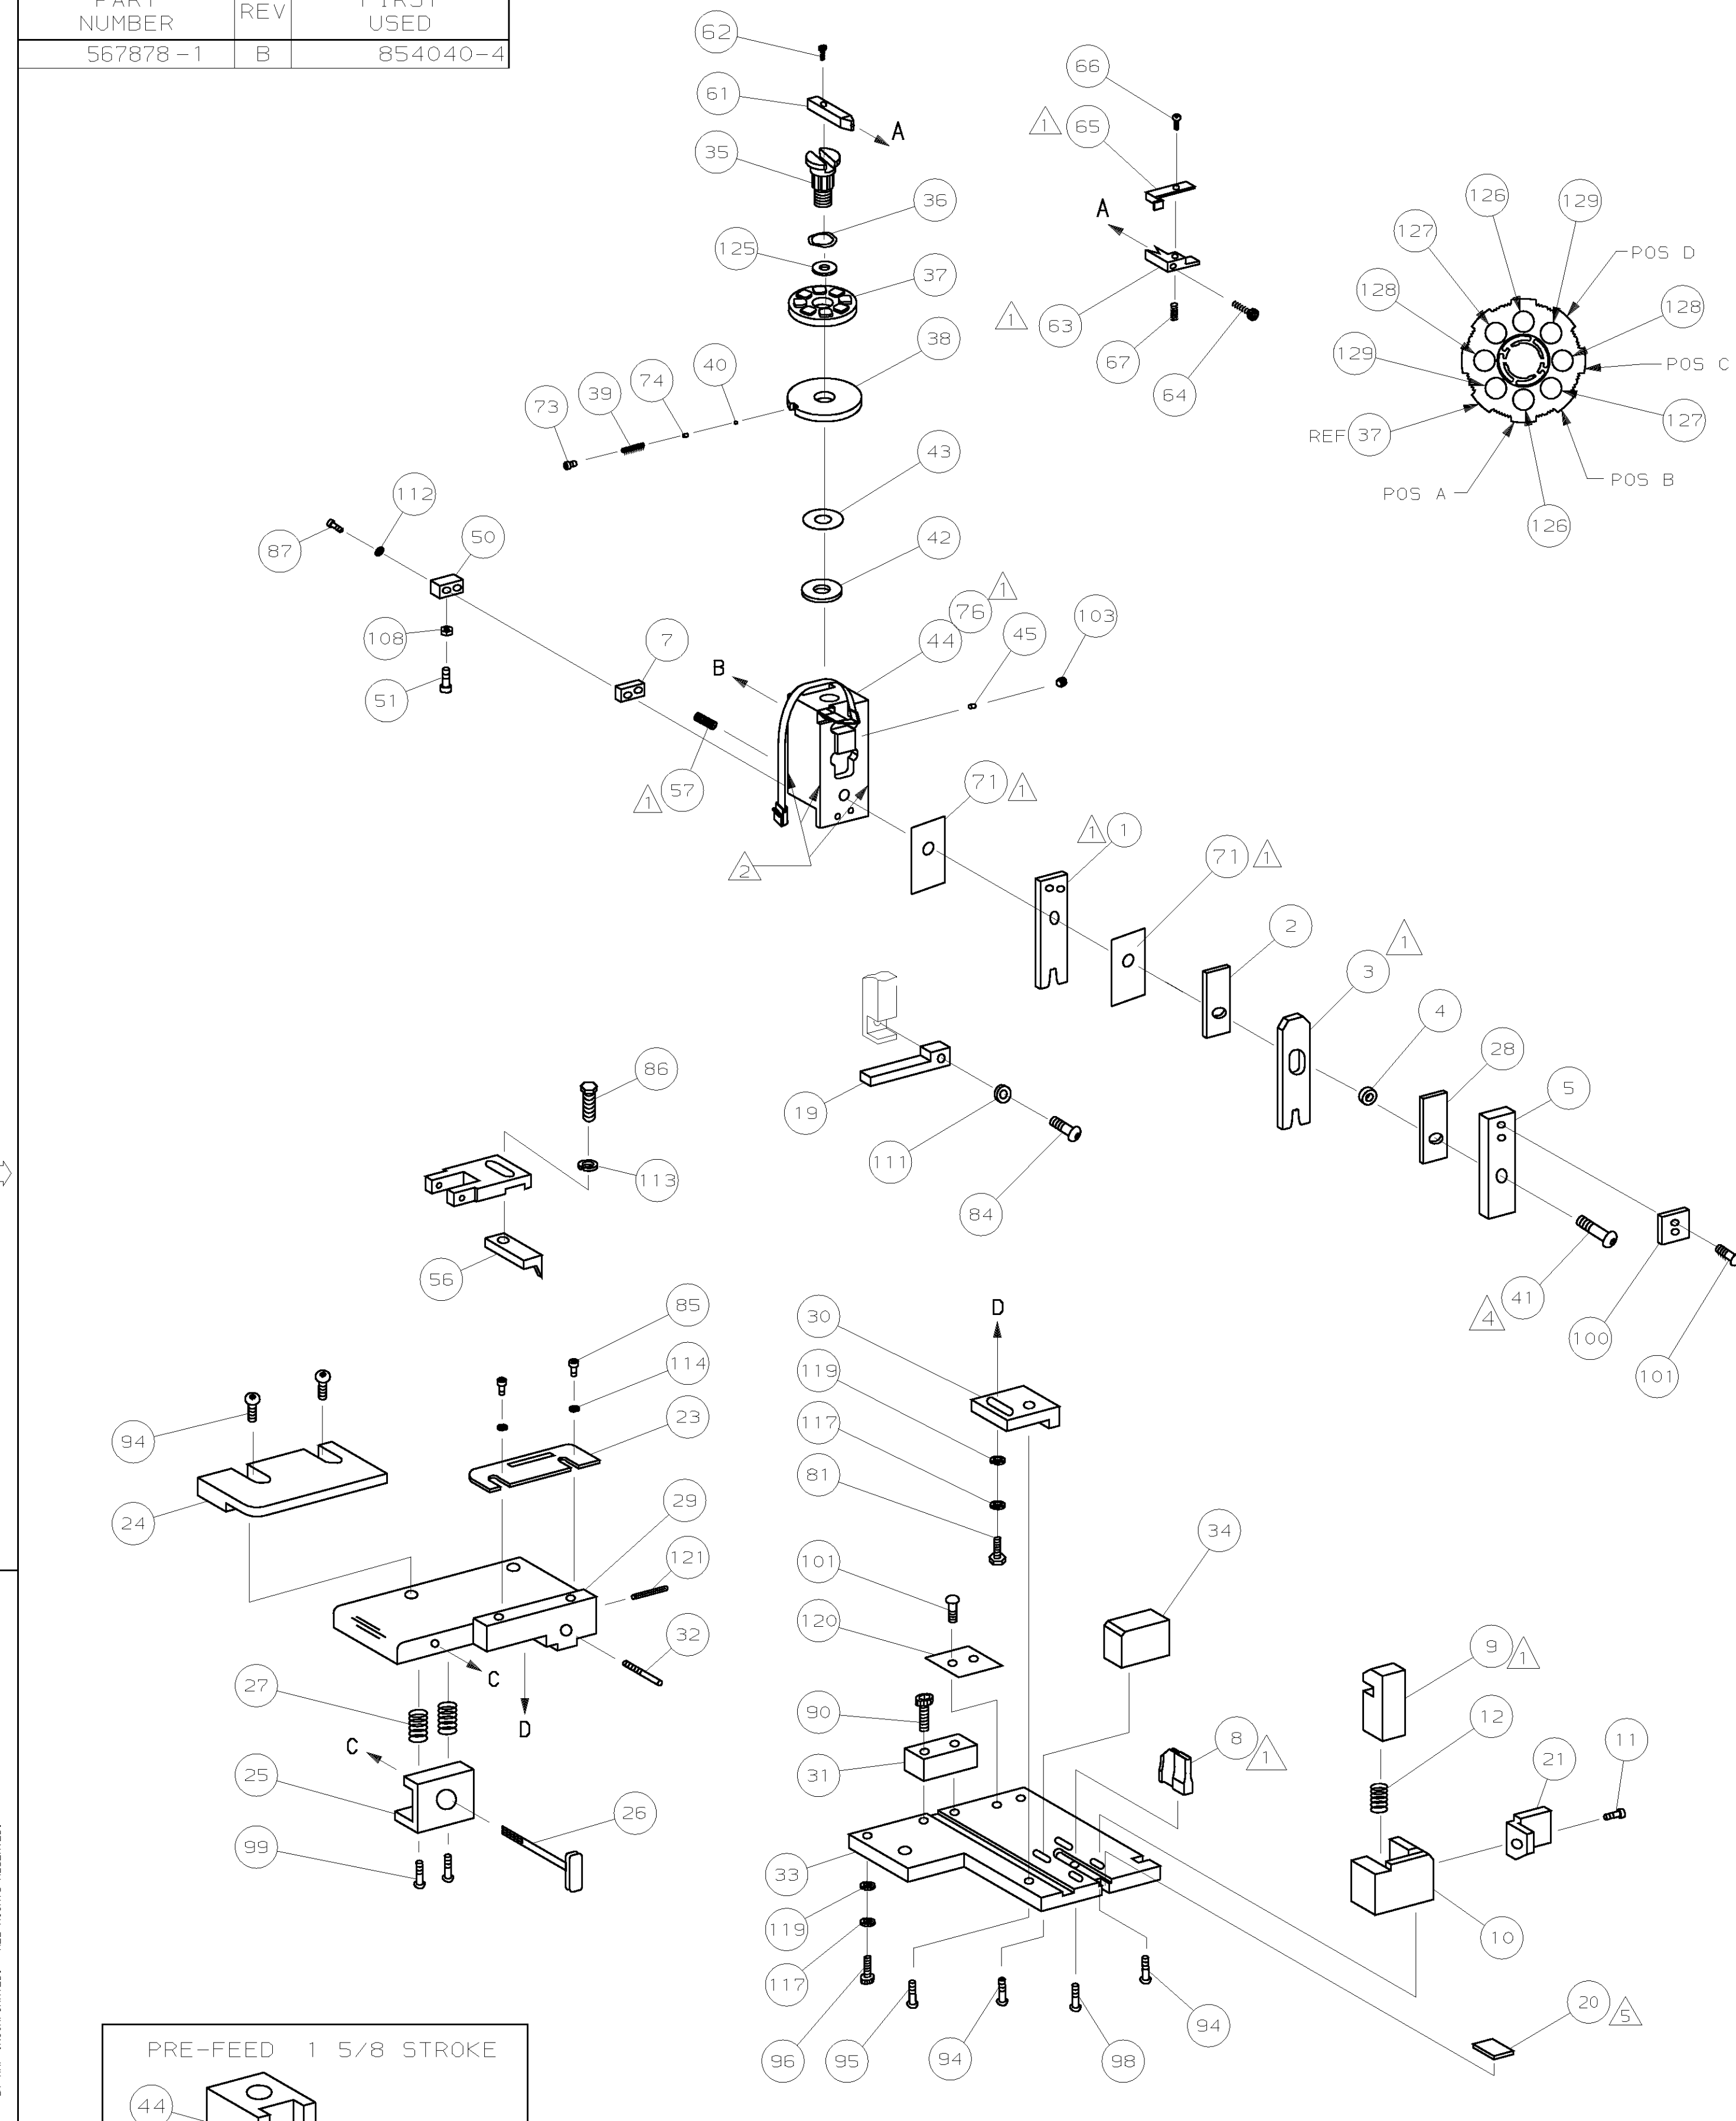

- 1 RECOMMENDED SPARE PARTS.
- 2 GREASE LIGHTLY.
- 3 ITEM NOT SHOWN
- 4 TORQUE ITEM 41 TO 60 INCH POUNDS
- 5 ATTACH ITEM 20 TO ITEM 33 USING ADHESIVE PART NUMBER 28998-6.
- 6 CRIMP HEIGHTS TO BE CHECKED IN MILLIMETERS.
- 7 INSULATION CRIMP HEIGHT IS 2.3mm-2.5mm.

567878