

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED TOLERANCES ARE:
 ONE PLACE DECIMALS ± .1 [3] THREE PLACE DECIMALS ± .005 [.13]
 TWO PLACE DECIMALS ± .01 [.3] FOUR PLACE DECIMALS ± .0020 [.051]
 ANGLES ± 2°

TITLE: MODIFIED LOW PROFILE TERMINAL ASSEMBLY
 DWG NO: MTLW-1XX-XX-XX-X-XXX-XX-XX
 SHEET 2 OF 2


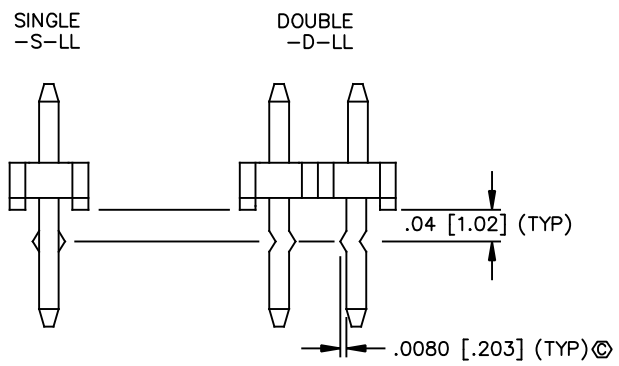



FIG. 1
 -LL OPTION
 LOCKING LEAD

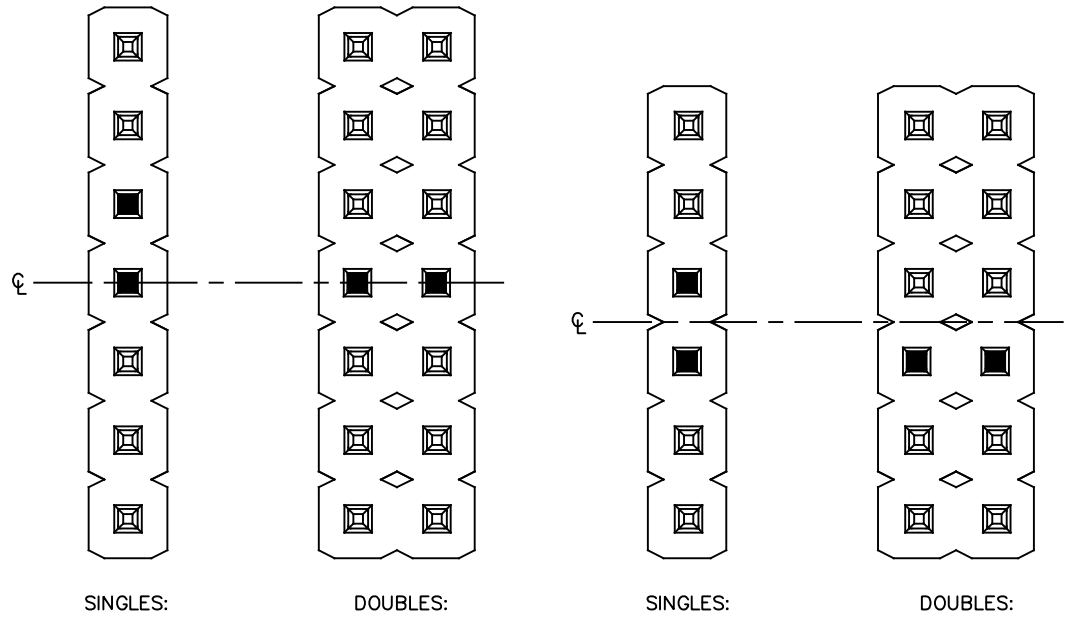

SINGLES: DOUBLES: SINGLES: DOUBLES:

ODD POSITIONS EVEN POSITIONS

LOCKING LEAD
 ■ = CRIMP LOCATION

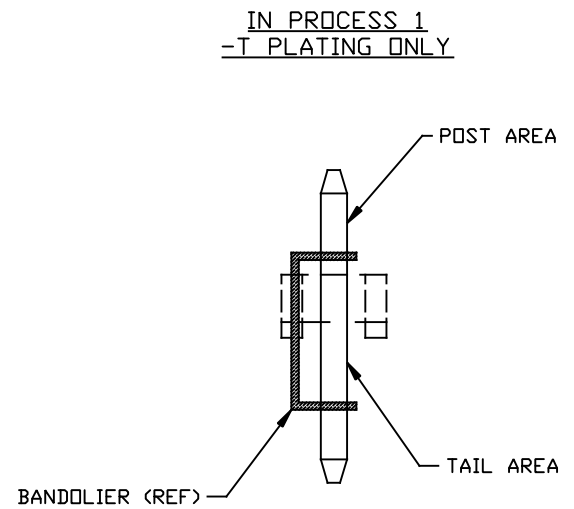

⊙(SEE NOTE 7)
 (SEE TABLE 2)

TABLE 2

LEAD STYLE	NUMBER OF BAND MARKS ALLOWED IN POST AREA	
	PIN #1	PIN #2
*-05	1	1
-06	1	1
-07	1	1
-08	1	1
*-09	2	2
*-10	2	2
-22	2	2
-23	1	1
-24	1	1

* PINS TO BE FLIPPED OPPOSITE OF SELECTIVE PLATING BEFORE BEING INSERTED

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

EXP/PROD/ASSEMBLY/100 MTLWASBZ

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
 PHONE (812) 944-6733 P.O. BOX 1147
 CODE 55322

MADE BY: M PUFFER 8-15-97 MTLW-1XX-XX-XX-X-XXX-XX-XX
 SHEET 2 OF 2