

Termination resistor - SAC-5P-MINMS TR-DN - 1434701


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



DeviceNet termination resistor, 5-pos., 7/8"-UNF connector



Key commercial data

Packing unit	0
Minimum order quantity	1
Catalog page	Page 407 (PC-2011)
GTIN	 4 046356 362511
Custom tariff number	85366990
Country of origin	GERMANY

Technical data

General data

Number of positions	5
Volume resistance	≤ 5 mΩ
Insulation resistance	≥ 10 MΩ
Ambient temperature (operation)	-40 °C ... 80 °C (Male connector / female connector)

General characteristics

Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Insertion/withdrawal cycles	100
Contact material	CuZn
Contact surface material	AU
Contact carrier material	PA 66
Material of grip body	TPU
Sealing material	TPU

Conductor data

Termination resistor - SAC-5P-MINMS TR-DN - 1434701

Classifications

eclass

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27060307
eCl@ss 6.0	19070403
eCl@ss 7.0	19070403

etim

ETIM 2.0	EC000448
ETIM 3.0	EC000448
ETIM 4.0	EC000448

unspsc


UNSPSC 6.01	31251501
UNSPSC 7.0901	32121609
UNSPSC 11	32121609
UNSPSC 12.01	32121609
UNSPSC 13.2	32121609

Drawings

Circuit diagram


Contact assignment and wiring of the 7/8" termination resistor

Schematic diagram



Connector pin assignment for 7/8"-16UNF conn., 5-pos.

Dimensioned drawing

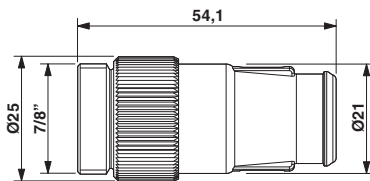

7/8" termination resistor