
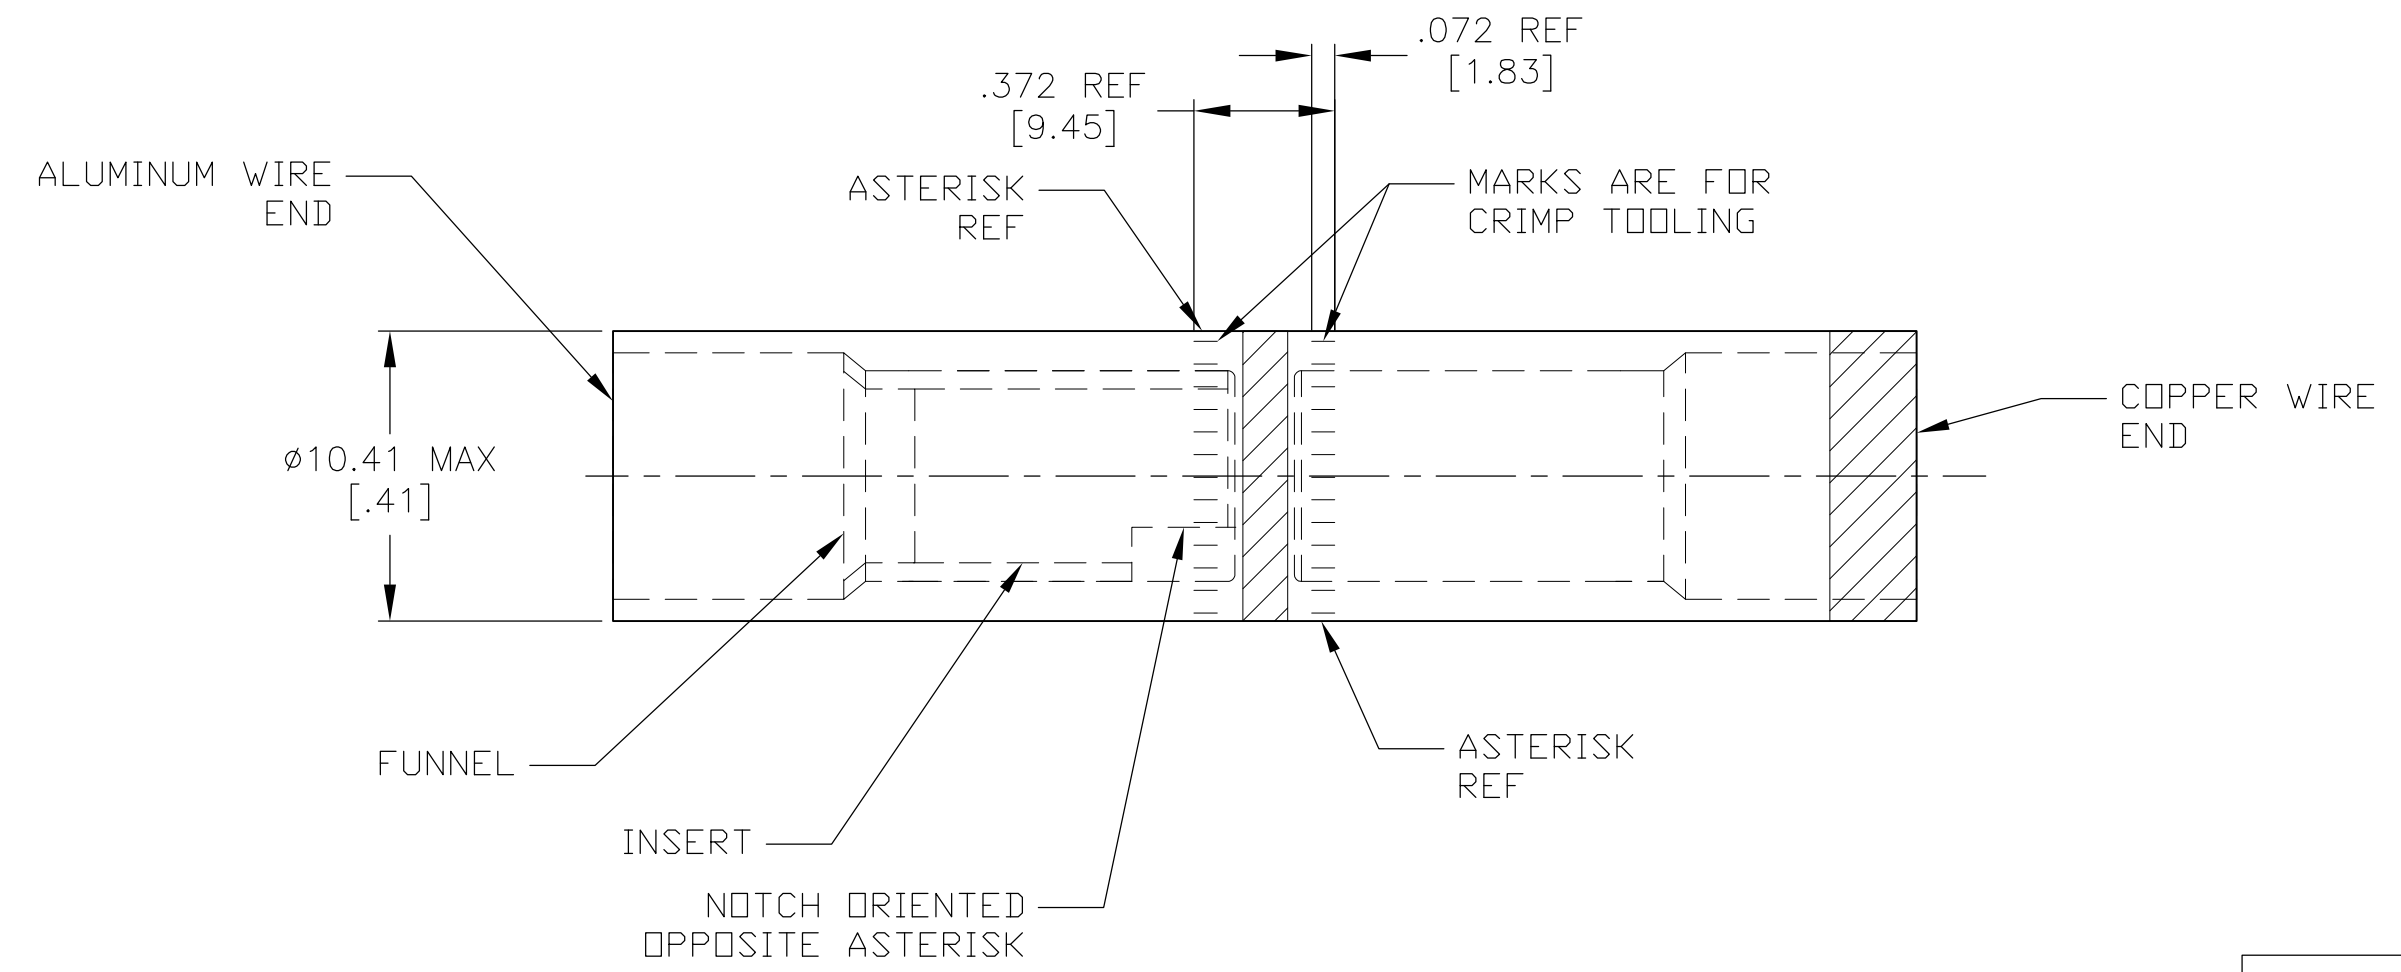


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	OWN	APVD	
	G	REV PER ECO-11-017221		12OCT11	PY	BW	

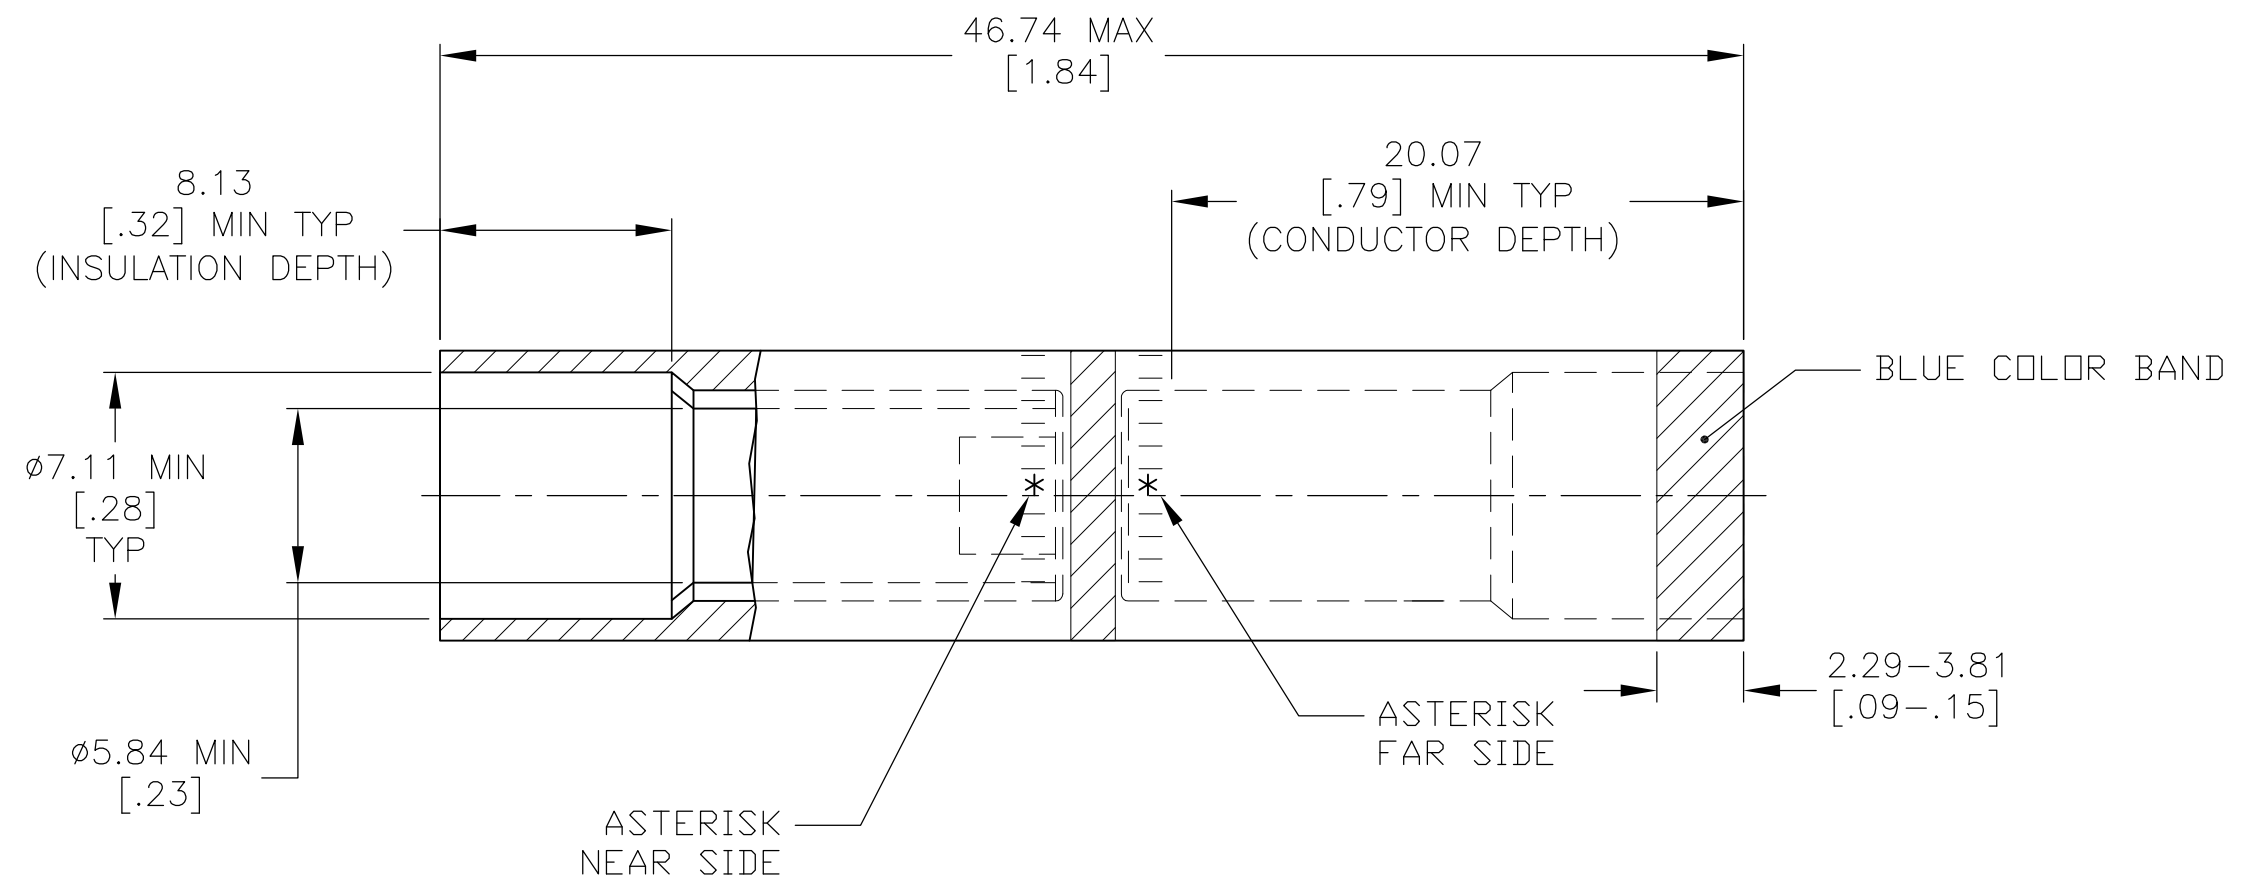

1. WIRE INSULATION: 5.72[.225] - 6.35[.250] DIA
2. 55984-1 AND AMP 6AL-6CU MARKED ON PART.
3. QUALIFIED TO ALUMINUM WIRE AMPERAGE ONLY- 6AL = 83 AMPS.

SPLICE: COPPER ASTM B-187 TIN PL ASTM B 545 0.00381[.000150] MIN THK	55984-1
INSERT & FUNNEL: BRASS ASTM B36 NICKEL PL SAE AMS QQ-N-290A, DATED JULY 2000, 0.00254 [.000100] MIN THK	
MATERIAL & FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 5-4-11	TE Connectivity NAME WIRE SPLICE, TRANSITIONAL, SEALED COPALUM, [6] ALUMINUM - [6] COPPER PRODUCT SPEC 108-11011 APPLICATION SPEC 114-2134	RESTRICTED TO	
DIMENSIONS: mm [INCHES]		CHK B.WALTERS 5-4-11		SIZE	A2
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD B.WALTERS 5-4-11		CAGE CODE	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± ± -		WEIGHT 16.9 GRAMS		DRAWING NO 00779	
MATERIAL SEE TABLE	FINISH SEE TABLE	CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV G	