



| DATE | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|---------------------------|------|------|-----|
| 11/05/05 | A | ADDED "ROHS COMPLIANT" | T.B. | B.S. | |
| 3/18/06 | B | UPDATED MATERIAL SPEC. | T.B. | B.S. | |
| 5/06/06 | C | ADDED CONTACT RESI. INFO. | T.B. | B.S. | |

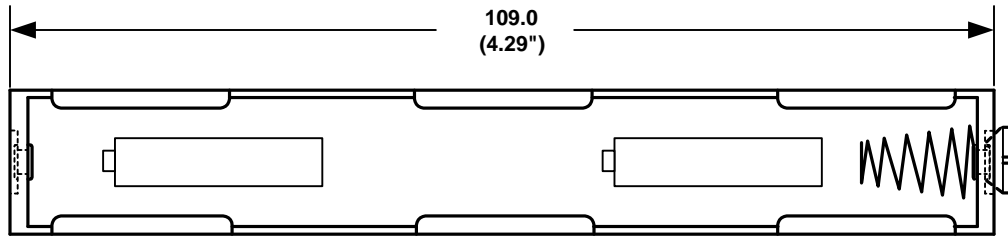


ORDERING CODE **BH14AA**

| | |
|-------------------|------|
| SOLDER LUGS | = L |
| (6") WIRE LEADS | = W |
| 9 VOLT TYPE SNAPS | = SF |

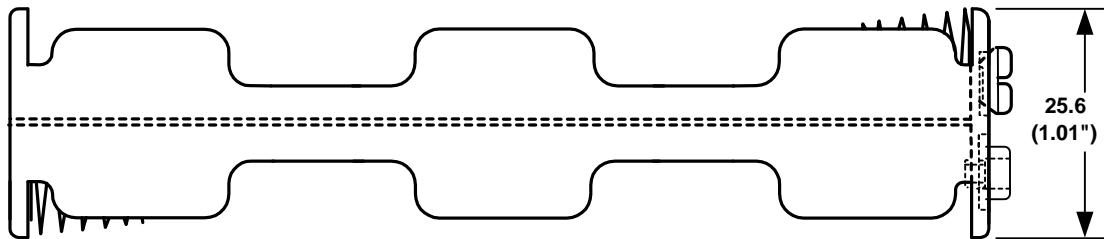


WIRE LEADS SHOWN ABOVE



SPECIFICATIONS :

Plastic material - polypropylene
 Flammability rating-UL94 HB, UL file no. E216959
 Temperature Range: -10°C to +100°C
 Springs - nickel plated spring steel
 Wire - 152.4 mm Ref.Long 26 AWG, UL1007, CSA - TR-64, 300V, 80° C.
 Rivets - Brass, nickel plated
 9 Volts Snaps - Brass, nickel plated
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS COMPLIANT

Note: Dimensions in mm. (inches)

| | | | |
|--|--|-----------------------------------|--|
| TOLERANCES (EXCEPT AS NOTED) |  Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| DECIMAL + .5 (.020") - .5 (.020") | SCALE NONE | DRAWN BY B.S. | |
| FRACTIONAL + .8 (.030") - .8 (.030") | TITLE FOUR "AA" CELL HOLDER | | |
| ANGULAR + 3° - 3° | DATE 5/06/2006 | DRAWING NUMBER BH14AASF | |
| APPROVED BY | | | |