
				 -
Ŧ	Q	нт – – – – – – – – – – – – – – – – – – –	m	C C





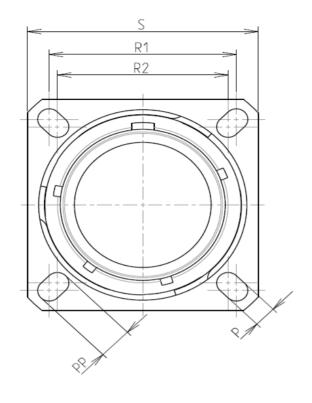

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 15

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	-65°C to +175°C			
-Salt Spray	: 500 hours			

: 24.88 g ± 10%

8D 0

G

15

W

05


В


F

Ν

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.39±0.2		
R1	24.61		
R2	23.01		
S	31±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M22x1-6g		

Е



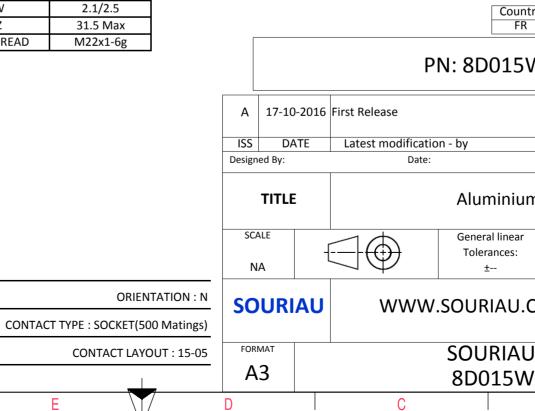

	σ		A			
					4	
SS EXA	AMPLE				3	
whice er of t idatic untry R	non-conformit ch does not co che Parties or b on, technical no Jurisd	mply with by a third part			2	
				MOD N°		
		CUSTOME	R DRAWING			
um	n Receptacle 8D series					
ar			PROJECT 59			
				perty of	1	
I.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U I	J DRG N° SHEET					
W0	5BN-C	1		1/2		
	В		А			

		۵	н г	m	D	0	
		Contact Layout					Panel Cutou
4	د ا	$ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ &$				SQUARE FLANGE RECEPTA REAR MOUNTIN	CLE (TYPE O)
		Location X-axis Y-axis (mm) (mm) +.000 (0.00) +.100 (2.54) +.174 (4.42) +.024 (0.61) +.094 (2.39) 148 (3.76) 094 (2.39) 148 (3.76) 174 (4.42) +.024 (0.61)					ØT
ω							Dim ØA ØAA R1 ØT
							hall not be liable for any
						the Specificat	use of the Products wh ions issued by either of essional recommendat
N							Countr FR
							PN: 8D015V
						10-2016 First Release DATE Latest modific	cation - by ate:
					тіт	LE	Aluminium
_					SCALE NA		General linear Tolerances: ±
					SOUF	RIAU WW	W.SOURIAU.C
					FORMAT A3		SOURIAU 8D015W
	Н	G	F	E	D	C	

