



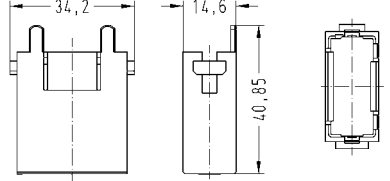
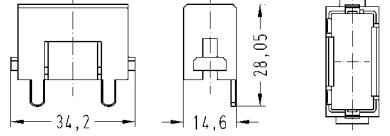


Number of contacts

# 20

32 V  
4 A  
+ shielding

Identification	Wire cross section (mm <sup>2</sup> )	Part number		Drawing Dimensions in mm												
		male	female													
<p>Han-Modular®, Han® Shielded Module insert, Crimp terminal, contact resistance ≤4 mOhm</p>  <p>Please order crimp contacts separately. Please order the adapter module separately.</p>		09 14 020 3013	09 14 020 3113													
<p>Han-Modular®, Adapter module</p>  <p>Han® D-Sub crimp contact, turned contacts</p> 	<p>0.09–0.25 0.13–0.33 0.25–0.52</p>	<p>09 14 001 3011 09 67 000 7576 09 67 000 5576 09 67 000 8576</p>	<p>09 14 001 3111 09 67 000 7476 09 67 000 5476 09 67 000 8476</p>	<p>M</p>  <p>F</p>  <table border="1" data-bbox="1037 1444 1500 1579"> <thead> <tr> <th>Wire gauge</th> <th>max. insulation diameter</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25 mm<sup>2</sup></td> <td>1.7</td> <td>4 mm</td> </tr> <tr> <td>0.13-0.33 mm<sup>2</sup></td> <td>1.7</td> <td>4 mm</td> </tr> <tr> <td>0.25-0.52 mm<sup>2</sup></td> <td>1.7</td> <td>4 mm</td> </tr> </tbody> </table>	Wire gauge	max. insulation diameter	Stripping length	0.09-0.25 mm <sup>2</sup>	1.7	4 mm	0.13-0.33 mm <sup>2</sup>	1.7	4 mm	0.25-0.52 mm <sup>2</sup>	1.7	4 mm
Wire gauge	max. insulation diameter	Stripping length														
0.09-0.25 mm <sup>2</sup>	1.7	4 mm														
0.13-0.33 mm <sup>2</sup>	1.7	4 mm														
0.25-0.52 mm <sup>2</sup>	1.7	4 mm														

Han-Modular