


HTHP LDD Indust X7R HT200C, Ceramic, 200C, 0.22 uF, 10%, 100 VDC, X7R, Commercial, High Temperature, Lead Spacing = 5.08mm

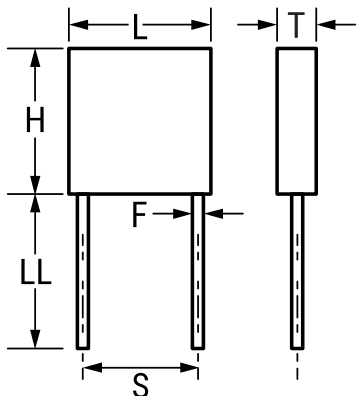

**Dimensions**

L	7.62mm MAX
H	7.62mm MAX
T	3.81mm MAX
S	5.08mm +/-0.76mm
LL	31.75mm MIN
F	0.635mm NOM

**Packaging Specifications**

<b>Packaging:</b>	Bulk, Bag
-------------------	-----------

**General Information**

<b>Supplier:</b>	KEMET
<b>Series:</b>	HTHP LDD Indust X7R HT200C
<b>Style:</b>	Radial
<b>Description:</b>	Commercial, High Temperature
<b>Features:</b>	Commercial
<b>RoHS:</b>	Yes
<b>Termination:</b>	Nickel

**Specifications**

<b>Capacitance:</b>	0.22 uF
<b>Capacitance Tolerance:</b>	10%
<b>Voltage DC:</b>	100 VDC
<b>Temperature Range:</b>	-55/+200C
<b>Temperature Coefficient:</b>	X7R