


## Specification Sheet

Part Number: MB510F4

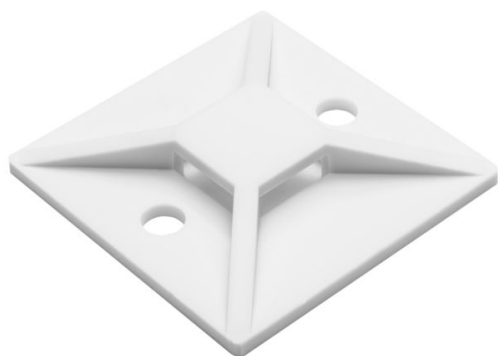

Screw-Mount Base, 1.49" x 1.49", .35" Max Tie Width, .19" Hole Dia, PA66, White, 250/pkg

**Article Number**

151-28504

**Type**

MB5

**Color**

White (WH)

**Features & Benefits**

- For use with 18 through 150 pound cable ties to provide stability when securing bundles.
- Secures with two or four screws; for multiple options.
- 4 way opening allows cable ties to be installed parallel or perpendicular to wire bundles.

**Quantity Per**

bag

**Product Description**

HellermannTyton screw fastened mounting bases are used with 18 through 150 pound cable ties to provide stability when securing bundles. The mounts are installed by securing two or four screws. The 4 way opening allows the cable ties to be inserted parallel or perpendicular to the wire bundles.

<b>Short Description</b>	Screw-Mount Base, 1.49" x 1.49", .35" Max Tie Width, .19" Hole Dia, PA66, White, 250/pkg
<b>Global Part Name</b>	MB5-PA66-WH
<b>Length L (Imperial)</b>	1.49
<b>Length L (Metric)</b>	37.7
<b>Fixation Method</b>	Screw Mounting and Rivet
<b>Width W (Imperial)</b>	1.49
<b>Width W (Metric)</b>	37.7
<b>Cable Ties</b>	T18 - T150
<b>Height H (Imperial)</b>	.25
<b>Height H (Metric)</b>	6.20
<b>Cable Tie Width Max (Imperial)</b>	0.35
<b>Cable Tie Width Max (Metric)</b>	8.9
<b>Mounting Hole Diameter D (Imperial)</b>	0.19
<b>Mounting Hole Diameter D (Metric)</b>	4.8 mm
<b>Mounting Hole Diameter D Max (Metric)</b>	4.8
<b>Mounting Hole Centers (Imperial)</b>	1.0

<b>Material</b>	Polyamide 6.6 (PA66)
<b>Material Shortcut</b>	PA66
<b>Flammability</b>	UL 94 V2
<b>Operating Temperature (Metric)</b>	-40°F to +185°F (-40°C to +85°C)
<b>ROHS Complaint</b>	Yes
<b>Certification/Specification WEB</b>	UL
<b>UL Recognized (US)</b>	Yes
<b>UL Recognized (US and Canada)</b>	Yes
<b>Package Quantity(Imperial)</b>	250
<b>Package Quantity (Metric)</b>	250
<b>Customs Number</b>	3926909987