


June, 2009

3M™ Scotch® Appliance Filament Tape 8916V

Product Description

Scotch® Appliance Filament Tape 8916V (Clear) is a high-performance, appliance-grade tape reinforced with continuous high-strength glass filaments and is designed to secure and hold appliance parts together during manufacture and throughout the shipping cycle. The 3M™ Scotchpro™ backing provides proper stiffness for ease of application, has excellent abrasion, moisture, and scuff resistance and is specifically formulated to provide high adhesion, clean removal, and stain resistance on most surfaces.

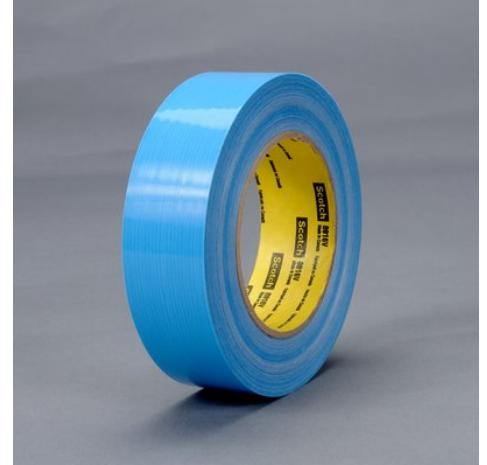

Technical Information Note

The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

Typical Physical Properties

Property	Values		Method
Backing Color	Clear		
Total Tape Thickness	0.17 mm	6.8 mil	ASTM D3652
Backing	3M™ Scotchpro™ film		
Adhesive	Pressure-sensitive synthetic rubber resin		
Reinforcement	Glass Yarn		

Typical Performance Characteristics

Peel Adhesion		
8.2 N/cm	82 N/100mm	75 oz/in

Property: Peel Adhesion
 Method: ASTM D3330
 Substrate: Stainless Steel

Tensile Strength		
367.8 N/cm	3,678 N/100mm	210 lb/in

Property: Tensile Strength
 Method: ASTM D3759

Elongation at Break: 3 %

Methods
 ASTM D3759

Storage and Shelf Life

Store behind present stock and in a clean, dry place. Temperature of 40-80°F (4-26°C) and 40-50% relative humidity are recommended. Rotate your stock. To obtain best performance, use this product within 18 months from date of manufacture.

Trademarks

Scotch is a registered trademark of 3M.
 3M and Scotchpro are trademarks of 3M.

References

1. 3m.com Product Page
Url: http://www.3m.com/3M/en_US/company-us/all-3m-products/~-/Scotch-Filament-Tape-8916V-Clean-Removal?N=5002385+3293193862&rt=rud
2. Safety Data Sheet
Url: https://www.3m.com/3M/en_US/company-us/SDS-search/results/?gsaAction=msdsSRA&msdsLocale=en_US&co=ptn&q=8916V

ISO Statement

This Industrial Adhesives and Tapes Division product was manufactured under a 3M quality system registered to ISO 9001 standards.

Technical Information

The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use

Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer

Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability

Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

