



DESCRIPTION: 2MM SHUNT LOW PROFILE, .075" 15 MICROINCH GOLD

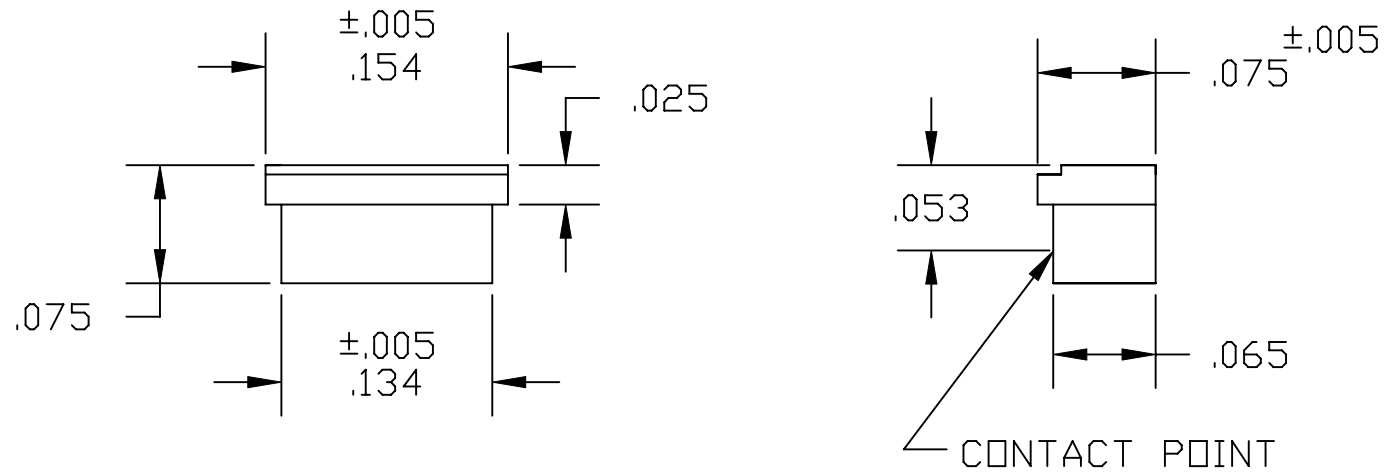

MATERIAL: HOUSING: HIGH TEMP. (PA-6T) 260° PROCESS TEMP.
 CONTACT: BERYLLIUM COPPER
PLATING: 15 MICRO-INCHES PALLADIUM/NICKEL WITH GOLD FLASH OVERALL
ELECTRICALS: CURRENT RATING: 1.0 AMPERE MAX.
 CONTACT RESISTANCE: 20 MILLIOHM MAX.
 DIELECTRIC WITHSTANDING: 250 VAC @SEA LEVEL
 INSULATION RESISTANCE: 10,000 MOHMS MIN.
 OPERATING TEMP: -55°C TO 105°C

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 12-12-06
			CHECKED:	DATE:
NorComp		SCALE:	SHEET 1 OF 1	REV 1
		DWG NO. 810-002-LP1R001		