


PART NAME	NON-METALLIC ENCLOSURE (STYLE D)	PART No.	NBD-10449 & NBD-10469 & NBD-15449
-----------	----------------------------------	----------	-----------------------------------

**MATERIAL:**  
**INDOOR VERSION**  
 SOLID BODY & COVER \_\_\_\_\_ ABS/PC BLENDED PLASTIC  
 UL94-5VB FLAMMABILITY RATING  
 CLEAR COVER \_\_\_\_\_ POLYCARBONATE PLASTIC  
 UL94V-0 FLAMMABILITY RATING  
 UV STABILIZED  
**OUTDOOR VERSION**  
 SOLID BODY & COVER \_\_\_\_\_ PBT/PC BLENDED PLASTIC  
 UL94-5VA FLAMMABILITY RATING  
 UV STABILIZED

**FINISH:**  
 BODY \_\_\_\_\_ LIGHT GRAY  
 COVER \_\_\_\_\_ LIGHT GRAY OR CLEAR  
 COVER INCLUDES GRAY POLY-URETHANE GASKET.

**INDUSTRY STANDARDS:**  
**INDOOR VERSION**  
 UL508 TYPE 1, 2, 4, 4X INDOOR, 12 & 13  
 NEMA TYPE 1, 2, 4, 4X, 12 & 13  
 IEC529-IP65  
**OUTDOOR VERSION**  
 UL508 TYPE 1, 2, 4, 4X, 12 & 13  
 NEMA TYPE 1, 2, 4, 4X, 12 & 13  
 IEC529-IP65

AIR AND MOISTURE VENTS, STAINLESS STEEL LOCKING HASP, PANEL MOUNTING RAILS, GALVANIZED STEEL INNER PANEL AND STAINLESS STEEL WALL MOUNTING BRACKETS ARE NOT INCLUDED, BUT CAN BE PURCHASED SEPARATELY.

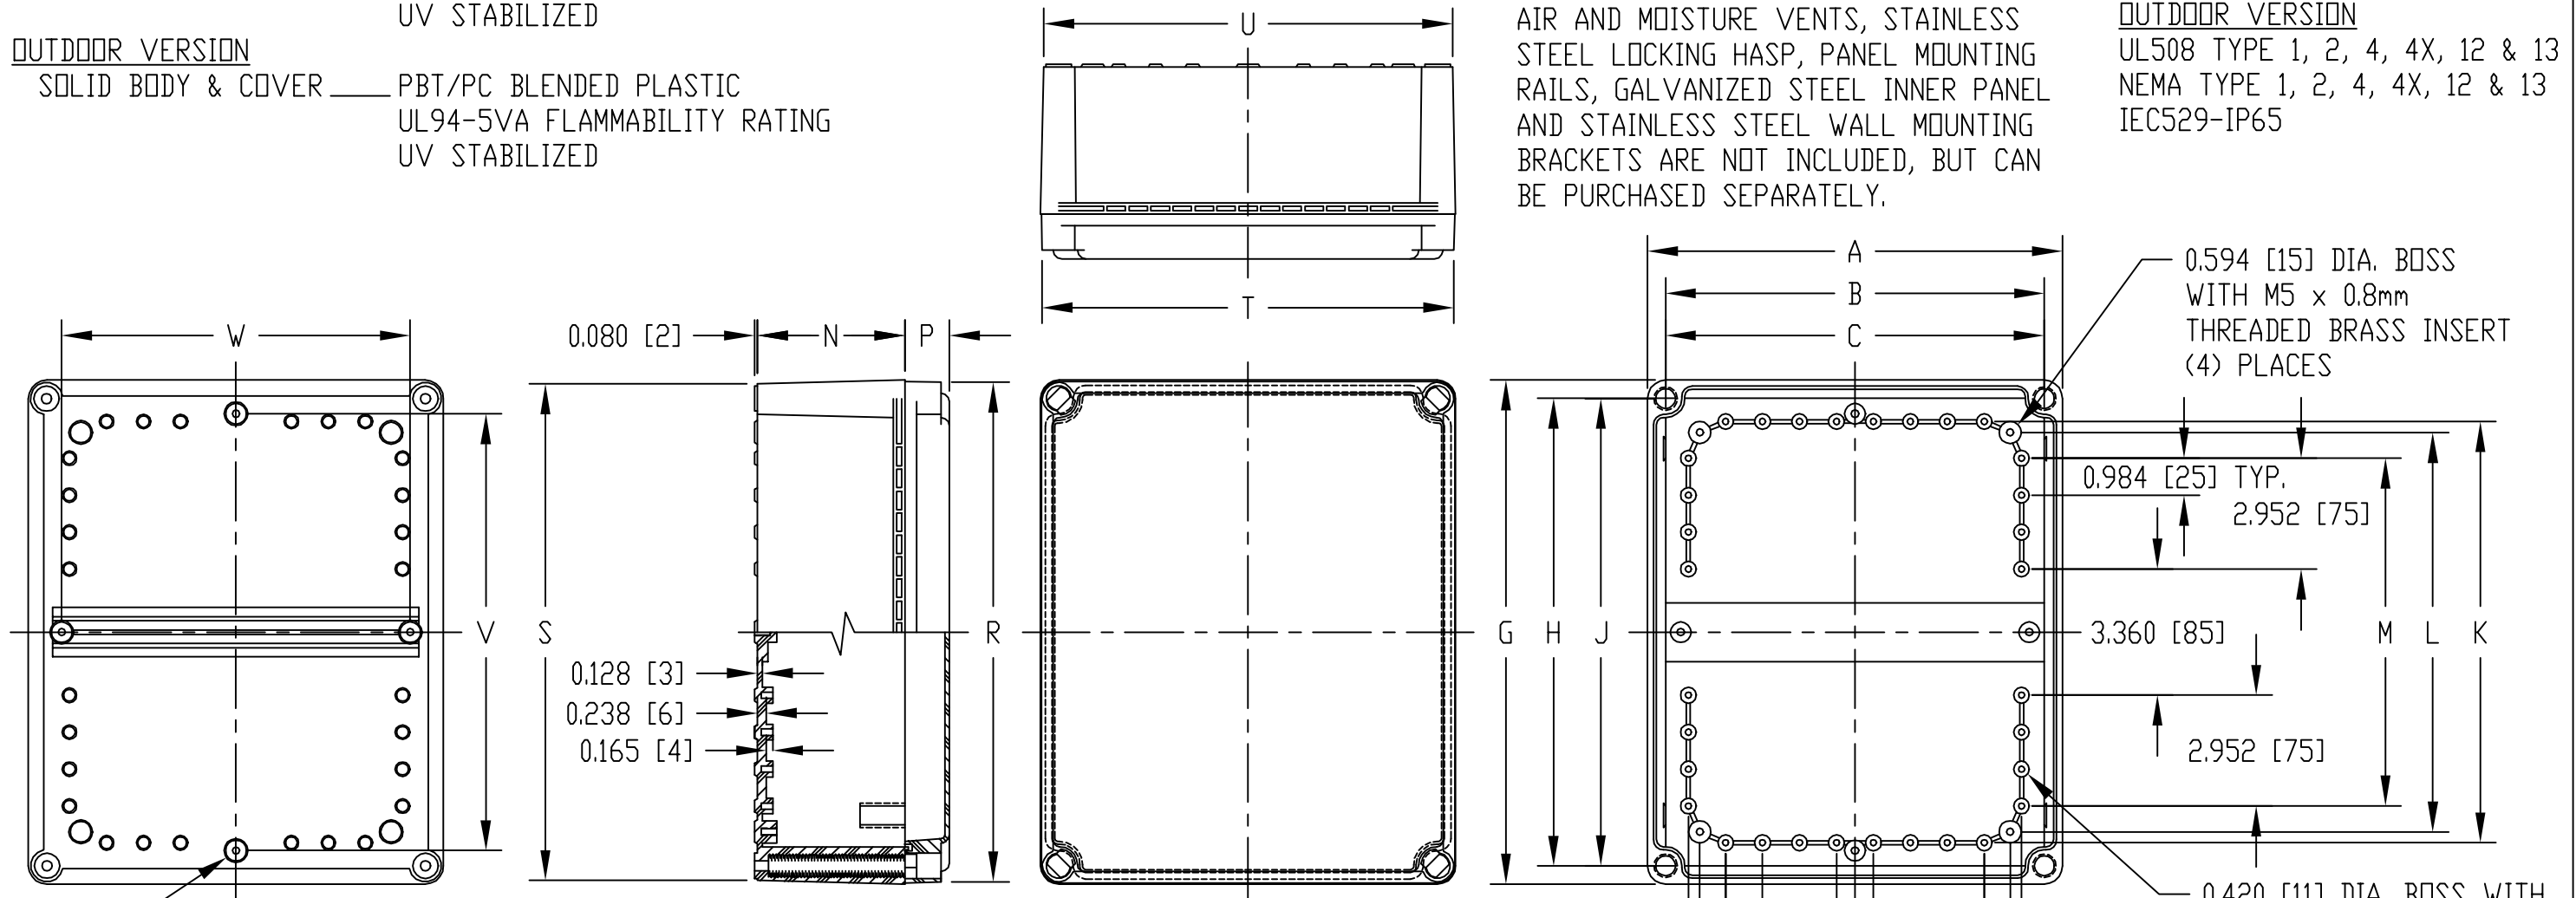

NOTE: COVER ATTACHES WITH PHILLIPS DRIVE NON-METALLIC SCREWS. (NOT SHOWN)

NOTE: ALL DIMENSIONS HAVE ±0.039 [±1] TOLERANCE UNLESS OTHERWISE SPECIFIED

DIMENSIONS = INCHES [MILLIMETERS]

VIEW LESS COVER

INDOOR VERSION		OUTDOOR VERSION	DIMENSIONS																			
PART NO.		PART NO.	DIMENSIONS																			
SOLID COVER	CLEAR COVER	SOLID COVER	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V	W
NBD-10449	NBD-10469	NBD-15449	11.052 [281]	10.090 [256]	10.086 [256]	8.870 [225]	8.265 [210]	6.888 [175]	13.423 [341]	12.460 [316]	12.443 [316]	11.220 [285]	10.637 [270]	9.264 [235]	3.920 [100]	1.191 [30]	13.310 [338]	13.230 [336]	10.960 [278]	10.890 [277]	11.634 [296]	9.280 [236]