

HC-B 10-KMQ-73/O1STM25


Order No.: 1647006



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1647006>

HEAVYCON coupling housing B10, with double locking latch, height 73 mm, with thread 1x M25

Commercial data

| | |
|--------------------------|--|
| GTIN (EAN) |  |
| Note | Made-to-order |
| sales group | D002 |
| Pack | 10 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 485 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data


General data

| | |
|--------|--|
| Note | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Design | B10 |
| Height | 73 mm |
| Width | 43 mm |
| Length | 73 mm |

| | |
|---------------------------------|---------------------------------|
| Housing type | Coupling housings |
| Locking type | With double locking latch |
| Type of the screw connection | 1x M25 |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |
| Seal material | NBR |
| Material lock | High-grade steel, handle: PA-GF |
| Material grip body interlock | PA-GF |

Diagrams/Drawings

Dimensioned drawing

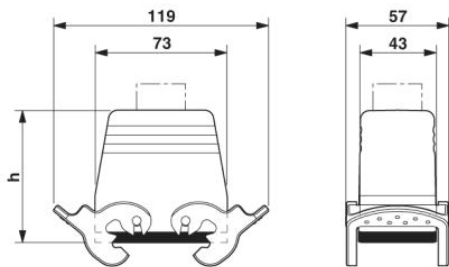

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;