

ENERGIZER E96


AAAA



Specifications


Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium
Designation:	ANSI-25A, IEC-LR8D425, LR61
Nominal Voltage:	1.5 volts
Nominal IR:	150 to 300 milliohms (fresh)
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	6.5 grams (0.2 oz.)
Typical Volume:	2.2 cubic centimeters (0.1 cubic inch)
Jacket:	Plastic Label
Shelf Life:	5 years at 21°C
Terminal:	Flat Contact

Industry Standard Dimensions

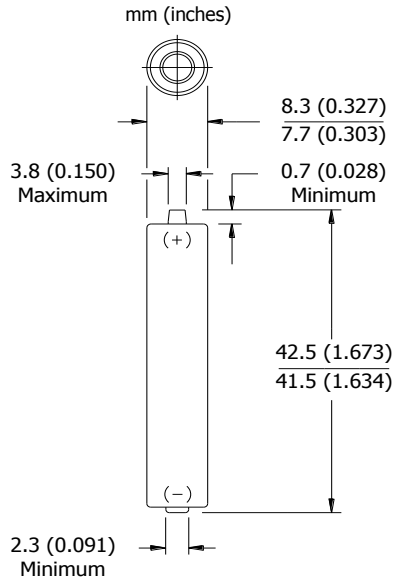

Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

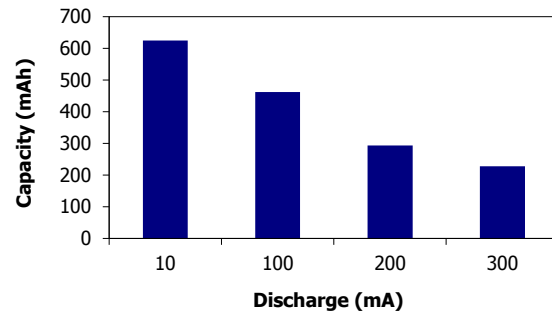

Device Selection Guide:

Battery Selection Indicator

Tape Player



Lighting



Laser pointer



High Drain Devices

Moderate Drain Devices

Low Drain Devices

Important Notice


This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER E96

AAAA


Constant Resistance Performance

Typical Characteristics (21°C)

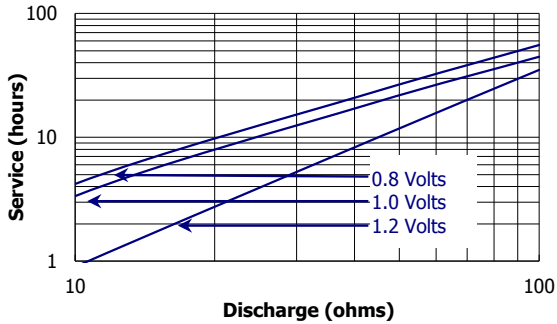


Constant Current Performance

Typical Characteristics (21°C)

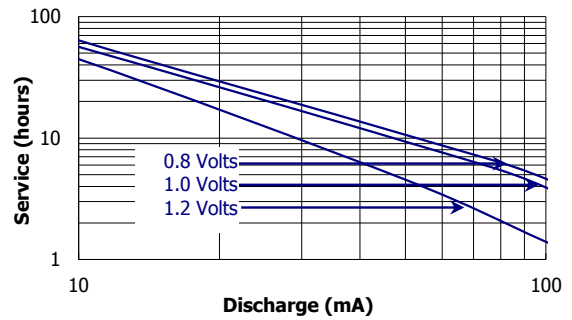


Constant Power Performance

Typical Characteristics (21°C)

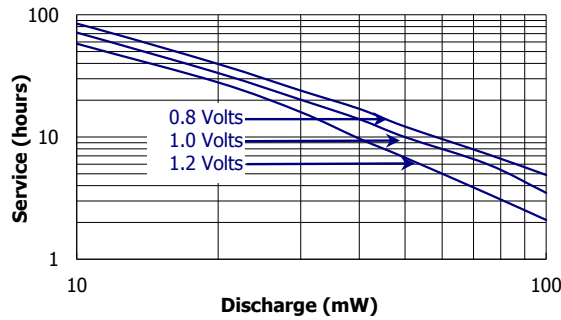


Industry Standard Tests (21°C)

LASER POINTER
75 ohm 1 hr/day

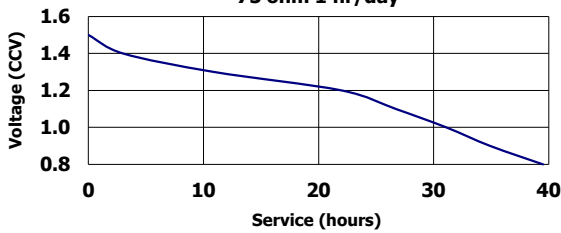

LIGHTING
3.9 ohm LIF

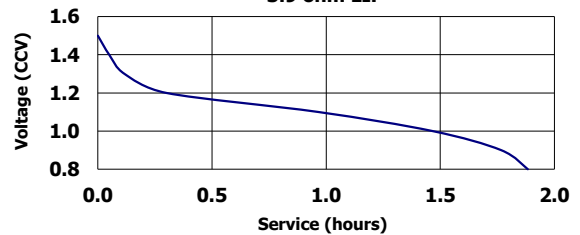

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.