Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	3	RE-F-06522	J.M		99.9.7
					. .
					. .

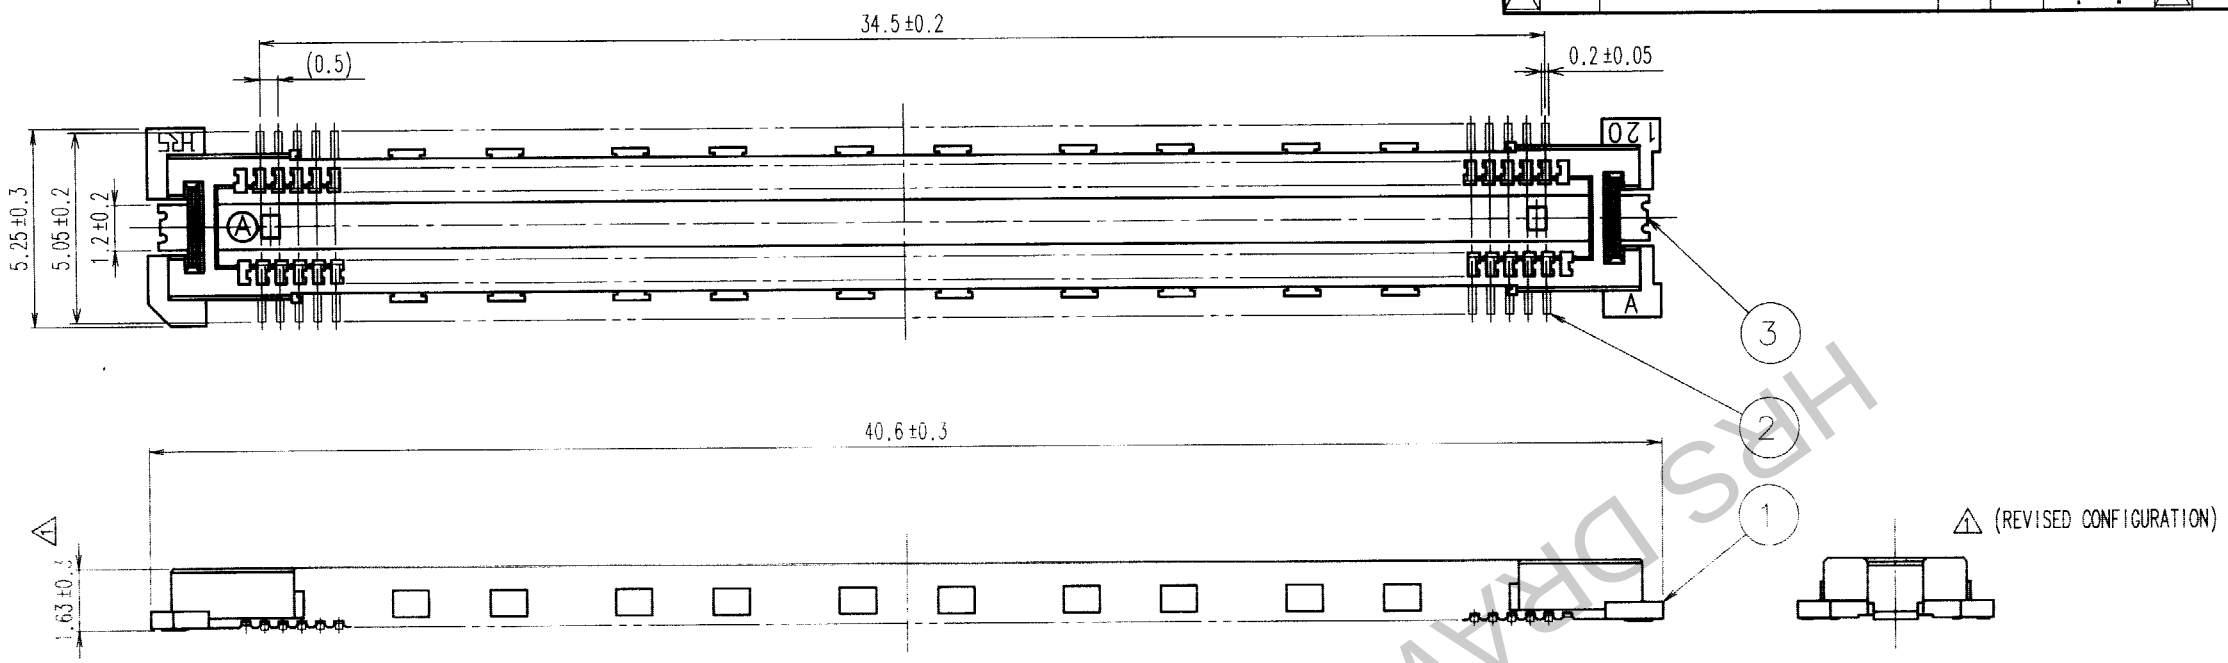

⚠1 (REVISED CONFIGURATION)

RECOMMENDED LAND PATTERN DIMENSION OF PCB

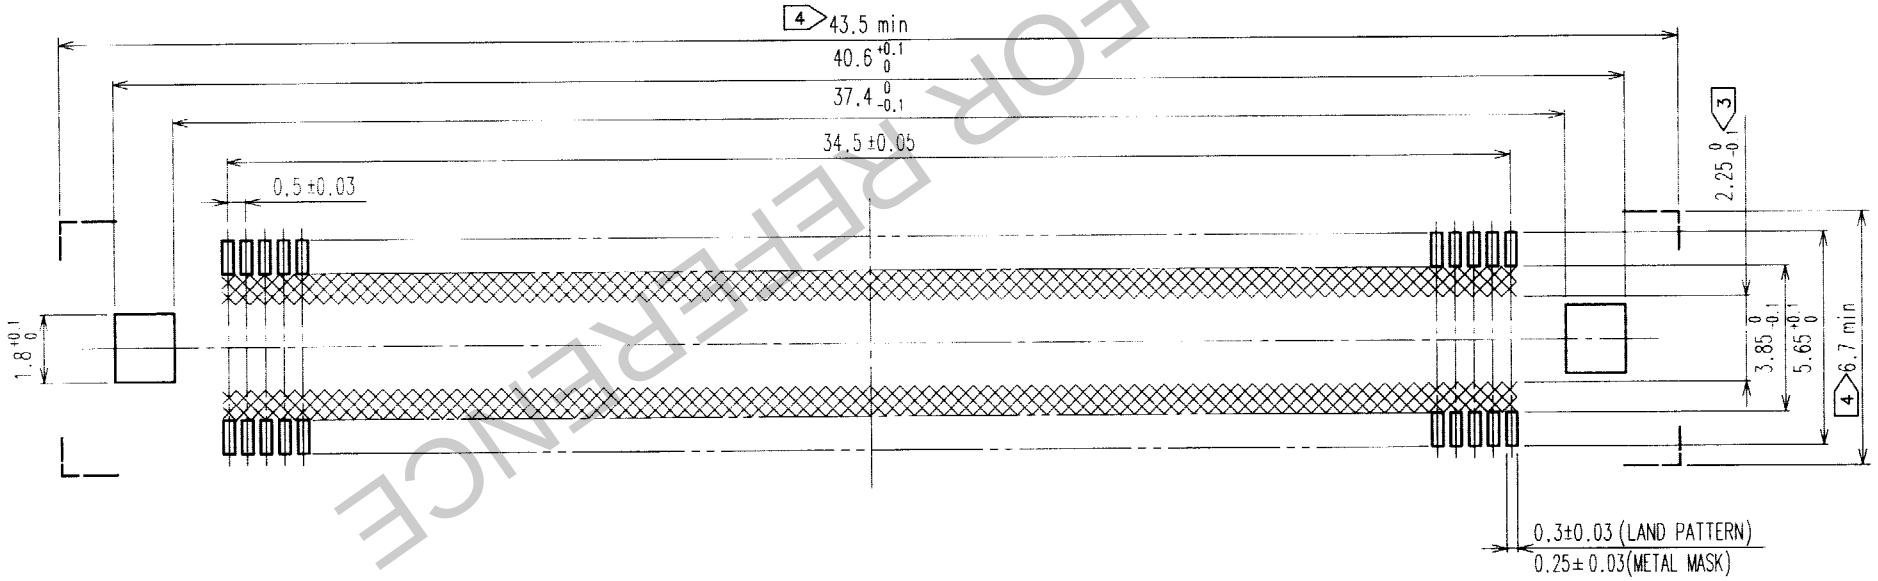

⚠1 SIGNAL PORTION CROSS SECTION (10:1)

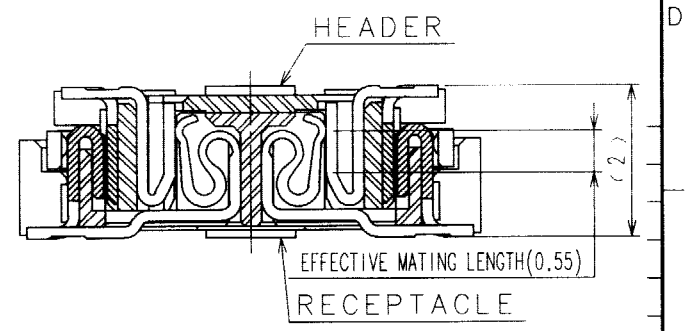

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
2	COPPER ALLOY	CONTACT AREA:GOLD (0.1μm) OVER NICKEL LEAD:GOLD FLASH OVER NICKEL			
1	LCP	BEIGE UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED

NOTES
1. SMT LEAD-COPLANARITY:0.1 MAX.
2. THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
3. MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED ▨ AREA.)
4. DO NOT MOUNT OTHER DEVICES ONTO ⊏ ⊐ AREA ,OR MATING PAIR CANNOT BE MATED.

TO
PCK

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	S.Kitajima 990525	J.Matsukawa 990525	M.Ishida 990526	Y.Yoshimura 990527	

SCALE 5 : 1
UNITS mm

DRAWING NO. EDC3-152107

PART NO. FX11LB-140P-SV

HRS HIROSE ELECTRIC CO.,LTD.

CODE NO. CL573-0055-3

1/1

FORM NO.229

HRS DRAWING FOR REFERENCE