


## 8.6kW 3-Phase Monitored PDU, LX Interface, 208/120V Outlets (36 C13/6 C19/3 5-15/20R), LCD, NEMA L21-30P, 3m/10 ft. Cord, 0U 1.8m/70 in. Height, TAA

MODEL NUMBER: PDU3EVN10L2130

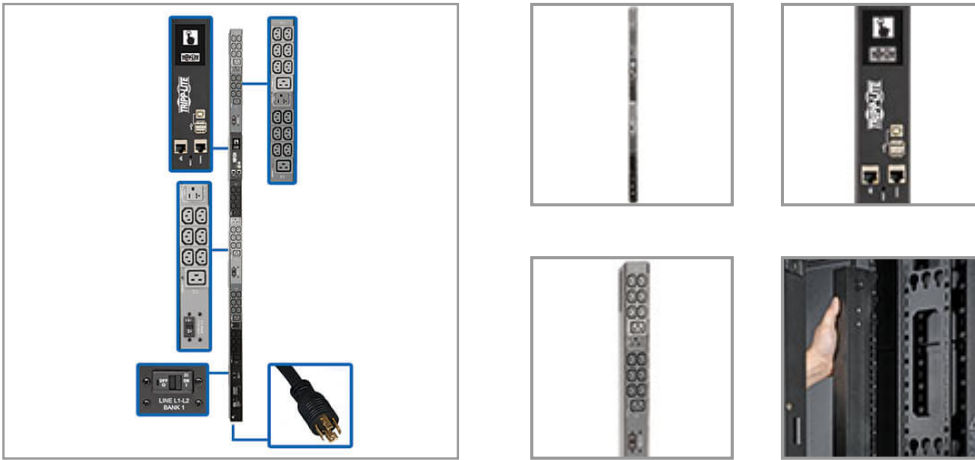

8.6kW L21-30P 3-phase PDU with multi-function touchscreen LCD distributes and monitors AC power. Built-in Java-free network interface helps you remotely monitor load levels to prevent overloads that cause downtime.

### Description

The PDU3EVN10L2130 8.6kW 3-Phase Monitored PDU provides real-time remote monitoring of voltage, frequency and load levels via built-in network connection. These advanced remote capabilities can save you money and reduce downtime.

Recommended for your IT or industrial application, the monitored PDU features 45 outlets—36 C13 (208V), 6 C19 (208V) and 3 NEMA 5-15/20R (120V)—with included plug-lock insert sleeves to prevent cables from becoming accidentally disconnected. A 10-foot cord with NEMA L21-30P input plug connects the 3-phase PDU to a compatible AC power source, generator or protected UPS.

The built-in Java-free HTML5-based LX Platform network interface enables full remote access for PDU status monitoring and email notifications via secure web browser, SNMP, telnet or SSH. It supports 10/100 Mbps auto-sensing for optimum communication with an Ethernet network. Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities. Protocols supported include IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP.

A color touchscreen LCD lets you toggle between menus to monitor input current level per phase and output current per load bank with  $\pm 1\%$  billing-grade accuracy, environmental sensor data and network information. It also generates a unique QR code to allow access to the PDU through a mobile device.

### Highlights

- 8.6kW 208/120V 3-phase 1.8-meter 0U monitored PDU
- 45 outlets—36 C13, 6 C19, 3 5-15/20R—with plug-lock inserts
- Built-in LX Platform interface for remote access 24/7
- NEMA L21-30P PDU input with 10 ft. AC power cord
- Touchscreen LCD with mobile access option via QR code

### Package Includes

- PDU3EVN10L2130 8.6kW 3-Phase Monitored PDU
- Built-in LX Platform interface
- Configuration cable
- (45) Plug-lock insert sleeves
- Rack-mounting hardware
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual



## Features

### Distributes and Monitors Network-Grade AC Power

- 8.6kW 208/120V monitored PDU with 3-phase input
- NEMA L21-30P plug with 10 ft. cord connects to compatible AC power source
- Firmware upgrades support future product enhancements

### 45 Outlets Distribute AC Power

- 36 C13 (208V), 6 C19 (208V) and 3 NEMA 5-15/20R (120V) split into 3 separately breakered load banks
- Plug-lock insert sleeves prevent cables from becoming accidentally disconnected

### Color Touchscreen LCD

- Reports network data, including IP address, input current level per phase and output current per load bank with  $\pm 1\%$  billing-grade accuracy
- Generates unique QR code for read-only access to PowerAlert® Device Manager via mobile device
- Full access available by logging into PowerAlert Device Manager via browser as user with read/write credentials

### Built-In HTML5-Based LX Platform Interface

- Allows full remote access for power monitoring with email notifications via secure web browser, SNMP, telnet or SSH
- Supports 10/100 Mbps auto-sensing for communication with an Ethernet network
- Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities
- No Java required

### Broad Communications Compatibility

- Supports IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP
- Supports automatic and manual assignment of IP address

### Easy 0U Installation in EIA-Standard 19 in. Racks

- Mounts vertically using included toolless buttons or rack-mounting brackets
- Included PDUMVROTATEBRKT allows mounting with rear-facing outlets

### TAA-Compliant

- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

## Specifications



<b>OVERVIEW</b>	
UPC Code	037332209443
PDU Type	Monitored
<b>OUTPUT</b>	
Output Capacity Details	8.6kW (208V) total capacity; 13.9A max per breakered outlet bank; 12A max per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(3) 5-15/20R; (36) C13; (6) C19
Output Receptacle Details	5-15/20R outlets provide 120V output; C13 and C19 outlets provide 208V output
Output Nominal Voltage	120; 208
Overload Protection	3 20A circuit breakers, one per output load bank
<b>INPUT</b>	
PDU Input Voltage	208
Recommended Electrical Service	30A 208V with L21-30R outlet
Maximum Input Amps	24
PDU Plug Type	NEMA L21-30P
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
Input Phase	3-Phase
<b>USER INTERFACE, ALERTS &amp; CONTROLS</b>	
Reported Load Segments	Supports monitoring of input current per phase (L1, L2, L3) and output current for each output load bank (B1-B6); Outlets are color-coded and labeled for phase and load bank identification; L1-L2 feeds black C13/C19 outlets (B1); L2-L3 feeds dark-gray C13/C19 outlets (B2); L3-L1 feeds light-gray C13/C19 outlets (B3); L1-N feeds black 5-20R outlet (B4); L2-N feeds dark-gray 5-20R outlet (B5); L3-N feeds light-gray 5-20R outlet (B6)
Front Panel LCD Display	Touchscreen LCD reports NETWORK DATA (IP address, Subnet Mask, Gateway, MAC Address, Device Name, Model, Serial Number), INPUT PHASE DATA (Amperage, Wattage, Voltage per phase, plus Unbalance percentage), LOAD BANK DATA (Amperage, Wattage, Voltage per load bank, plus total PDU output in watts), CONFIGURATION DATA (Listing of current configuration settings), ENVIRONMENTAL DATA (Reports data and status of E2 sensor modules; Sensor options are available for temperature and humidity, plus input and output dry contacts), MOBILE ACCESS (Generates a unique QR code to view reported PDU details on a mobile device)
Current Measurement Accuracy (Amps)	+/-1%
Voltage Measurement Accuracy (Volts)	+/-1%
Power Measurement Accuracy (Watts)	+/-1%
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	75.87 x 9.65 x 7.09
Shipping Dimensions (hwd / cm)	192.71 x 24.51 x 18.01



Shipping Weight (lbs.)	17.75
Shipping Weight (kg)	8.05
Unit Dimensions (hwd / in.)	70 x 2.17 x 2.52
Unit Dimensions (hwd / cm)	177.8 x 5.5 x 6.4
Unit Weight (lbs.)	13.50
Unit Weight (kg)	6.12
Material of Construction	Metal
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	32 to 122F (0C to 50C)
Storage Temperature Range	5 to 140F (-15C to 60C)
Relative Humidity	5 to 95% non-condensing
Operating Elevation (ft.)	0 to 10,000
Operating Elevation (m)	0 - 3000 m
<b>COMMUNICATIONS</b>	
SNMP Compatibility	Pre-installed LX platform network interface
<b>CERTIFICATIONS</b>	
Certifications	Tested to UL60950-1 (USA) CAN/CSA 60950-1 (Canada), NOM (Mexico), FCC Class A Part 15 (Emissions), ROHS, TAA Compliant
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2018 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.tripplite.com/products/product-certification-agencies>