

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91 929

SWITCH - BASIC

CATALOG LISTING

V3-370

CK-D3469

REPLACES X101481-V3

RELEASE NO. PR-22590

CATALOG LISTING V3-370 PAGE 1 OF 1

ISSUE **M** 2

CHECK

REVISIONS

A 0005782
R J
04 JUN 04

CHECK



04 JUN 04

AK

CHECK

15 JAN 97

DDM/CAD
DRAWN
DCS

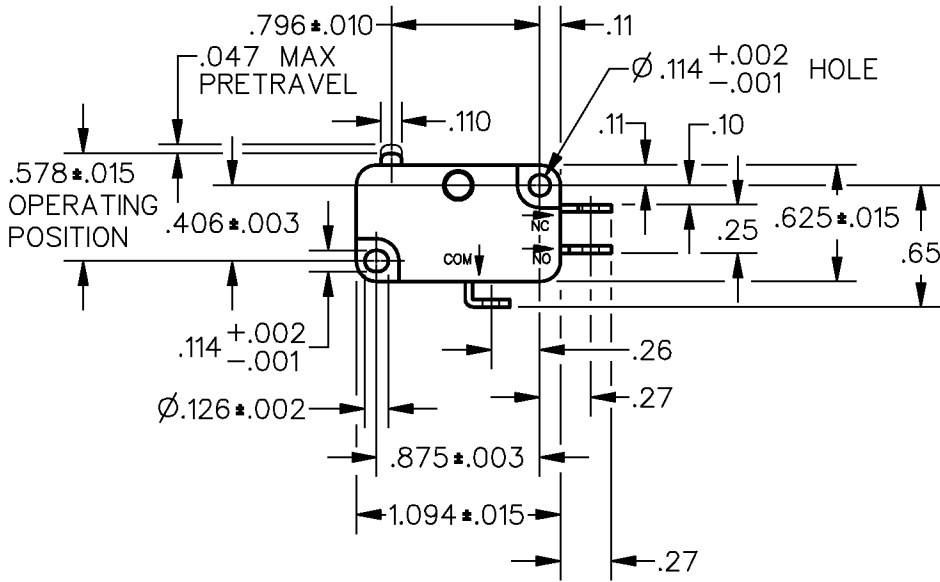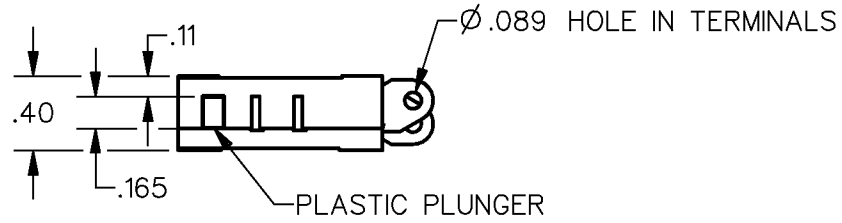


NOTES

- 1 - TERMINALS ARE PLATED FOR SOLDERING
- 2 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 3 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
- 4 - INSPECT SWITCH RESISTANCE PER CONTROL PLAN

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE --- 150 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE --- 25 GRAMS MIN	L22 1A 125 VAC	ONE PLACE (.0) ± .030	
DIFFERENTIAL TRAVEL --- .002-.010		TWO PLACE (.00) ± .015	
OVERTRAVEL --- .050 MIN		THREE PLACE (.000) ± .005	
FREE POSITION --- .625 MAX		ANGLES ±	
RELEASE TRAVEL --- .010 MIN		WEIGHT	

