


番号 (NUMBER)
753898-1

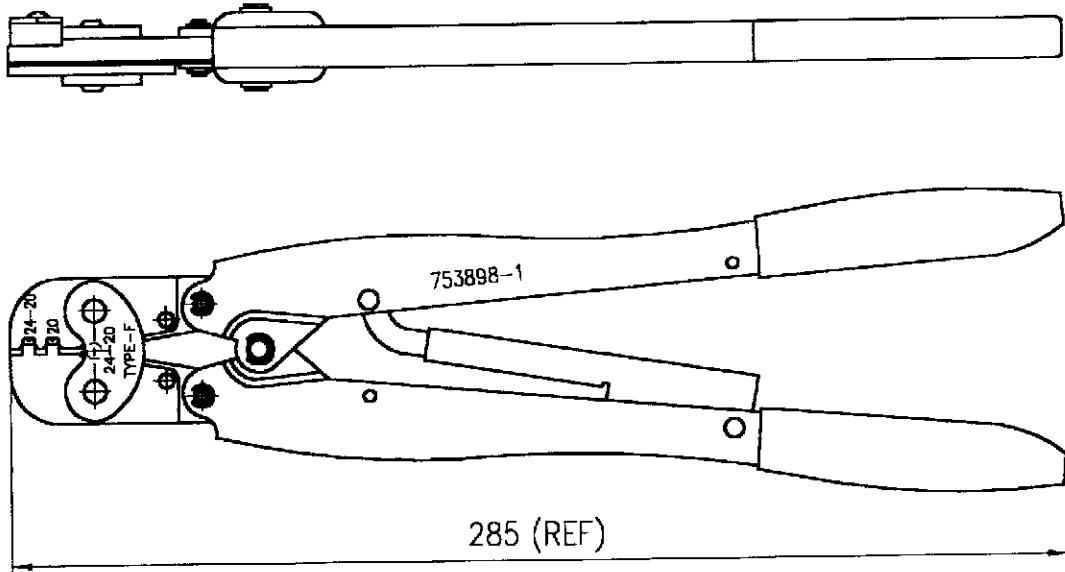

| CRIMP SYMBOL | TERMINAL NO | | WIRE SIZE (mm ²) | INSUL SIZE (mm) | TERMINAL C/H(mm) | | TERMINAL SPEC | IS NO. |
|--------------|-------------|--------|------------------------------|-----------------|------------------|---------|---------------|--------------|
| | STRIP | L.P. | | | WIRE | INS | | |
| 压着部 記号 | 適用端子 | | 適用電線 (mm ²) | 絶縁被覆径 (mm) | 芯線部压着高さ (mm) | | 压着規格 | IS 番号 |
| | 渡箱状 | バラ状 | | | WIRE | INS | | |
| 24-22 | // | 170330 | # 24-22 (0.20-0.35) | 1.50-1.90 | 0.90-1.05 | 2.2±0.2 | 114- 5041 | 411- 5261 |
| 20 | | | # 20 (0.50-0.53) | 2.00-2.70 | 1.00-1.20 | 2.5±0.2 | | |

単位: 尺 DIMENSIONS IN MM. DO NOT SCALE PRINT

| | | | | | | | | |
|---|--|-------------------|--|--|--|--|--|------------|
| 適合電線断面積 (WIRE RANGE) // mm ² (AWG //) | | | | 尺度 (SCALE) // 一般公差 | | 10以下 ±0.2 10を超え 30以下 ±0.25 30を超え 100以下 ±0.3 角 度 ±3° | | |
| 被覆外径 (INSULATION DIA.) // mm | | | | AMP 日本エー・エル・ピー株式会社 Kawasaki, Japan | | | | |
| 材料 (MATERIAL) // | | | | | | | | |
| DR. (19 NOV '97) R. SUZUKI | | APP S. YABE | | LOC J A4 | | 番号 (NO) 753898-1 | | REV. 01 |
| LTR. 変更 (REVISION RECORD) | | DR. CHK. DATE | | 名称 (NAME) DOUBLE ACTION HAND TOOL ASS'Y | | | | |
| DR. (19 NOV '97) R. SUZUKI | | APP S. YABE | | (CUSTOMER DRAWING) 参 考 図 面 | | | | |
| CHK. K. SHIMADA | | REL. K. KOMURO | | | | | | |