

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	8 AWG
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric
Wire Strip Length	5/8 in.
Stud Size	1/4 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90 ° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	RED
Panduit Die Index No. on Barrel	P21
Alternate Industry Die Index No. () on Barrel	N/A



LISTED
Wire Connector



CERTIFIED

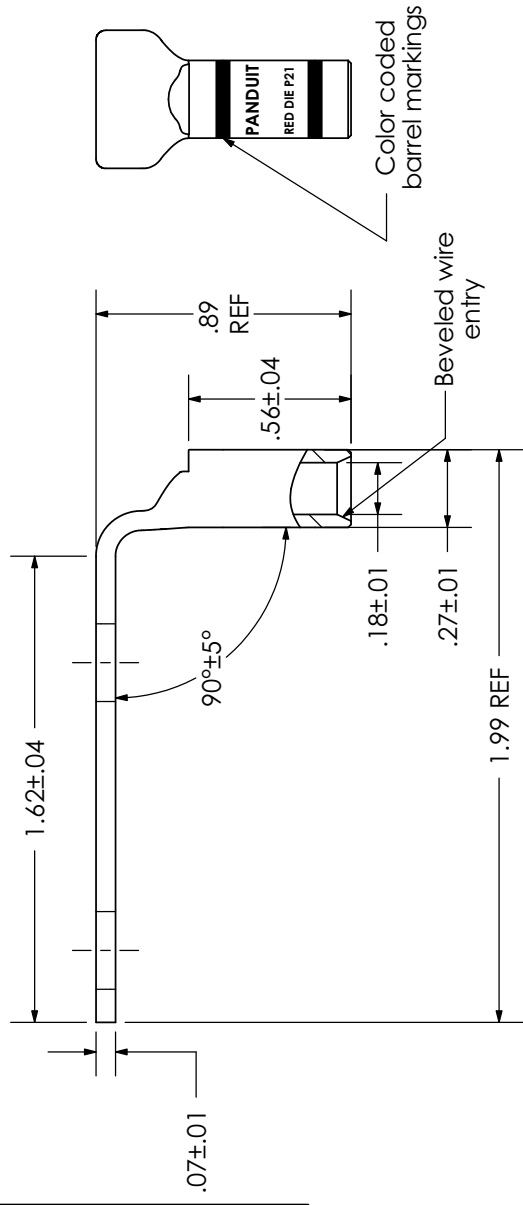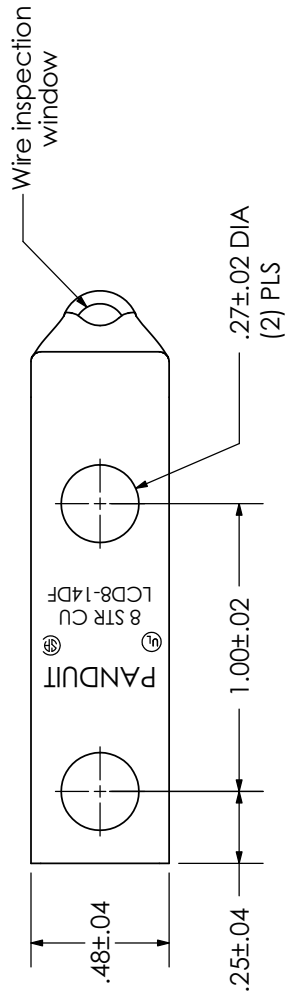

PANDUIT CORP. TINLEY PARK, ILLINOIS	
LCD8-14DF-L	
Copper Lug - Two-Hole, Standard Barrel, 90° Angle Tongue	
REV	DATE
01	2/10
BY	JHNU JHNU
CHK	ADDED UL, CSA & PART NO. TO STAMP
ECN	DESCRIPTION
N/A	
DRAWING NO / CAD FILE	LCD8-14DF-CUST